

**UMTRI-93-28**

**EFFECTS OF VOLTAGE DROP  
ON RISE TIME AND LIGHT OUTPUT  
OF INCANDESCENT BRAKE LAMPS  
ON TRUCKS**

**Michael Sivak  
Takashi Sato  
Michael J. Flannagan**

**July 1993**

EFFECTS OF VOLTAGE DROP ON RISE TIME AND LIGHT OUTPUT  
OF INCANDESCENT BRAKE LAMPS ON TRUCKS

Michael Sivak  
Takashi Sato  
Michael J. Flannagan

Report No. UMTRI-93-28  
July 1993



Technical Report Documentation Page

1. Report No. UMTRI-93-28		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Effects of Voltage Drop on Rise Time and Light Output of Incandescent Brake Lamps on Trucks				5. Report Date July 1993	
				6. Performing Organization Code 302753	
7. Author(s) Michael Sivak, Takashi Sato, Michael J. Flannagan				8. Performing Organization Report No. UMTRI-93-28	
9. Performing Organization Name and Address The University of Michigan Transportation Research Institute Ann Arbor, Michigan 48109-2150 U.S.A.				10. Work Unit No. (TRAI5)	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address The University of Michigan Industry Affiliation Program for Human Factors in Transportation Safety				13. Type of Report and Period Covered	
				14. Sponsoring Agency Code	
15. Supplementary Notes The Affiliation Program currently includes Bosch, Carello Lighting, Donnelly, Ford (Plastic and Trim Products Division), GM (Inland Fisher Guide Division), Ichikoh Industries, Koito Manufacturing, LESCOA, Libbey-Owens-Ford, Muth Advanced Technologies, Osram Sylvania, Philips Lighting, PPG Industries, Stanley Electric, and 3M.					
16. Abstract <p>This study evaluated the effects of voltage on rise time and light output from incandescent brake lamps for a range of voltages representing realistic values for large trucks. The findings indicate that, relative to nominal voltage of 12.8 V, realistic voltages for large trucks lead to significant increases in rise time and to decreases in light output. At 9 V, for example, 90% of the asymptotic light output is reached about 113 ms later than at 12.8 V, and the asymptotic light output is about 28% of the output at 12.8 V. Analogous comparisons of 6 V with 12.8 V indicate an increase in the rise time to 90% of asymptotic light output of about 316 ms, and a decrease in asymptotic light output to about 5%. The obtained changes in rise time and light output of incandescent lamps as a function of voltage are of practical importance because they can be expected to increase reaction times of following drivers to brake signals and increase the frequency of missed signals.</p>					
17. Key Words Brake lamps, brake lights, stop lamps, trucks, lorries, rise time, light output, luminous intensity, voltage			18. Distribution Statement Unlimited		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 9	22. Price



## ACKNOWLEDGMENTS

Appreciation is extended to the members of The University of Michigan Industry Affiliation Program for Human Factors in Transportation Safety for support of this research. The current members of the Affiliation Program are:

Bosch  
Carello Lighting  
Donnelly  
Ford (Plastic and Trim Products Division)  
GM (Inland Fisher Guide Division)  
Ichikoh Industries  
Koito Manufacturing  
LESCOA  
Libbey-Owens-Ford  
Muth Advanced Technologies  
Osram Sylvania  
Philips Lighting  
PPG Industries  
Stanley Electric  
3M



## CONTENTS

ACKNOWLEDGMENTS.....	ii
INTRODUCTION .....	1
METHOD .....	2
RESULTS.....	3
CONCLUSIONS.....	5
REFERENCES.....	6





## INTRODUCTION

This study dealt with the effects of voltage drop on rise time and light output of incandescent brake lamps. Even under nominal conditions when 12.8 V is applied, incandescent brake lamps have a relatively slow rise time. No measurable light is emitted for about 50 ms, and about a quarter of a second is required for the filament to reach 90% of the asymptotic output (Flannagan and Sivak, 1989). This slow rise time of conventional brake lamps can cause important delays of warning information to following drivers (Flannagan and Sivak, 1989; Sivak and Flannagan, 1993).

The problem is aggravated as the voltage is reduced from the nominal 12.8 V. Voltage drop is particularly a problem in large trucks because of long lead wires between the battery and brake lamps. A recent survey performed for the U.S. Department of Transportation examined the issue of voltage drop in a sample of 546 large trucks (Copenhaver, Guirrier, and Ching, 1990). The results at 700 RPM (normal idle) are shown in Table 1. (The voltages at 1,100 RPM were only slightly higher. For example, the mean for doubles at 1,000 RPM was 9.9 V, compared to 9.8 V at 700 RPM.)

The present study evaluated the effects of voltage drop on rise time and light output for a range of voltages representing realistic in-traffic values for large trucks. Based on the data from Copenhaver et al. (1990), the range of voltages used was from 12.8 V to 6 V.

Table 1  
Voltage at brake lamps for a sample of 546 large trucks  
(adapted from Copenhaver et al., 1990).

Vehicle Type	Minimum (V)	Maximum (V)	Mean (V)	Standard Deviation (V)
Dumptrucks	10.3	13.1	12.2	0.8
Vans	8.8	13.8	11.6	1.0
Tanks	7.5	13.4	11.5	1.2
Flatbeds	6.5	13.2	11.4	1.2
Doubles	6.0	12.4	9.8	1.5
Triples	5.5	11.1	8.4	1.6



## METHOD

### Brake lamp

We used one brake lamp for all measurements. The lamp had a standard incandescent light source, No. 1157. This light source has two filaments; the voltage was applied to the brake filament.

### Voltages

A regulated power supply was used to generate one of eight different voltages: 12.8, 12, 11, 10, 9, 8, 7, and 6 V.

### Procedure

Light output (after it passed through the red lens of the lamp) was measured by a Minolta illuminance meter, Model T-1, positioned 1 m from the brake lamp. The voltage and illuminance information were fed into an oscilloscope. The images of the changes of voltage and light output were photographed for later analyses.

The lamp was left in the off-state for one minute to cool down between each measurement.



## RESULTS

The light-output curves by voltage (normalized to the output at 12.8V) are presented in Figure 1. Table 2 lists the delay in reaching the 90% level of asymptotic output as a function of voltage. Table 3 lists the asymptotic light output as a function of voltage.

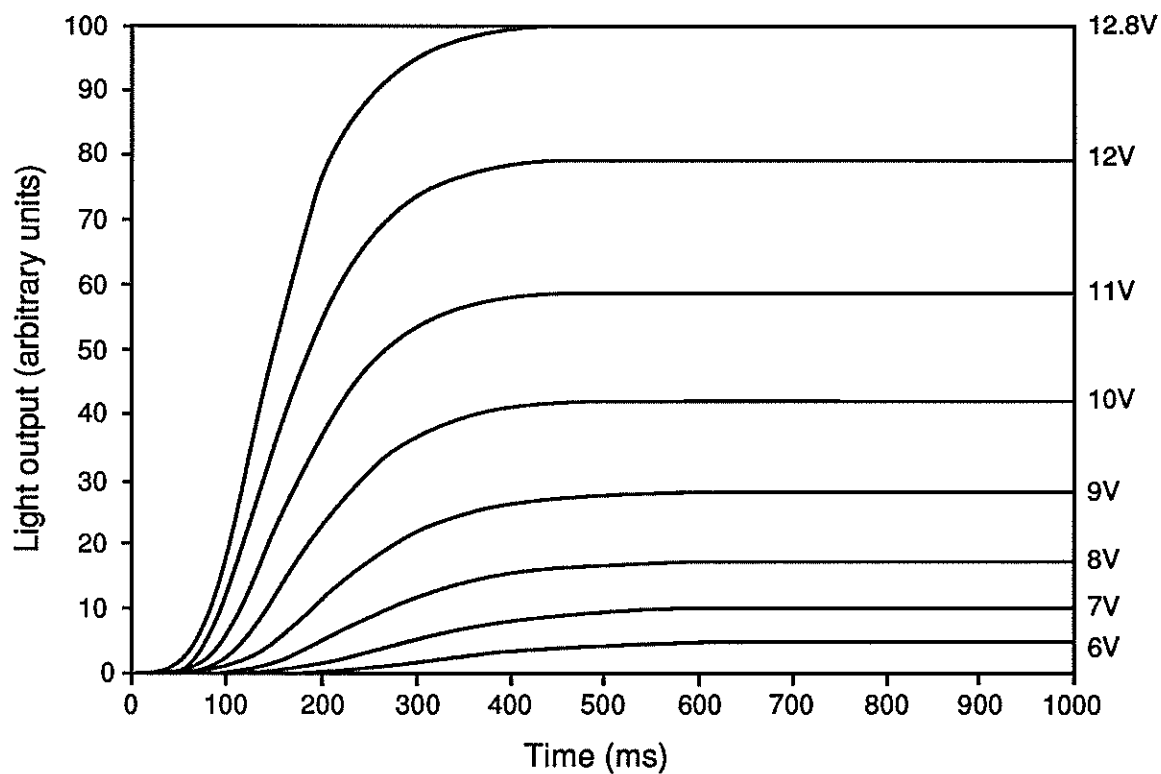


Figure 1. Light output as a function of voltage.



Table 2  
 Delay in reaching 90% of asymptotic light output  
 by voltage.

Voltage (V)	Delay (ms)
12.8	259
12	282
11	294
10	320
9	372
8	410
7	487
6	575

Table 3  
 Asymptotic light output by voltage (as a percentage  
 of asymptotic light output at 12.8 V).

Voltage (V)	Light output (%)
12.8	100
12	79
11	59
10	42
9	28
8	18
7	10
6	5





## CONCLUSIONS

The present findings indicate that, relative to nominal voltage of 12.8 V, in-service voltages of large trucks lead to significant increases in rise time and decreases in light output from incandescent brake lamps. At 9 V, for example, 90% of the asymptotic light output is reached 113 ms later than at 12.8 V, and the asymptotic light output is 28% of the maximum at 12.8 V. Analogous comparisons of 6 V with 12.8 V indicate an increase in rise time of 316 ms and a decrease in light output to 5%.

Reaction time to the onset of light stimuli increases with either an increase in the rise time of the stimulus (Flannagan and Sivak, 1989), or a decrease in the intensity of the stimulus (Teichner and Krebs, 1972). Consequently, the obtained changes in rise time and light output of incandescent lamps as a function of voltage are of practical importance. Reduced voltage can be expected to cause an increase in reaction times of following drivers to brake signals. Furthermore, the reduced light output will likely result in an increase in the frequency of missed brake signals.



## REFERENCES

- Copenhaver, M.M., Guerrier, J., and Ching, H. (1990). *Photometric and electrical performance characteristics of rear lighting equipment on in service truck trailers* (Report No. DOT HS 807 845). Washington, D.C.: U.S. Department of Transportation.
- Flannagan, M. and Sivak, M. (1989). *An improved braking indicator* (SAE Technical Paper Series #890189). Warrendale, PA: Society of Automotive Engineers.
- Sivak, M. and Flannagan, M. (1993). Fast-rise brake lamp as a collision prevention device. *Ergonomics*, 36, 391-395.
- Teichner, W. and Krebs, M. (1972). The laws of simple visual reaction time. *Psychological Review*, 79, 344-358.

