DOI: 10.1002/aenm.201801027

Article type: Full Paper

Title Unexpectedly Strong Auger Recombination in Halide Perovskites

Jimmy-Xuan Shen<sup>†</sup>, Xie Zhang<sup>†</sup>, \*, Suvadip Das, Emmanouil Kioupakis, and Chris G. Van de Walle<sup>\*</sup>
† These two authors contributed equally to this work.

Dr. Jimmy-Xuan Shen

Department of Physics, University of California, Santa Barbara, CA 93106-9530, USA

Dr. Xie Zhang, Prof. Chris G. Van de Walle

Materials Department, University of California, Santa Barbara, CA 93106-5050, USA

E-mail: xiezhang@ucsb.edu

E-mail: vandewalle@mrl.ucsb.edu

Dr. Suvadip Das, Prof. Emmanouil Kioupakis

Department of Materials Science and Engineering, University of Michigan, Ann Arbor, MI 48109, USA

Keywords: DFT calculations, Auger recombination, halide perovskite, light-emitting diode

The emergence of halide perovskites for photovoltaic applications has triggered great interest in these materials for solid-state light-emission. Higher-order electron-hole recombination processes can critically affect the efficiency of such devices. In the present work, we compute the Auger recombination coefficients in the prototypical halide perovskite, CH<sub>3</sub>NH<sub>3</sub>PbI<sub>3</sub> (MAPbI<sub>3</sub>), using first-

This is the aptit a manuscript accepted for publication and has undergone full peer review but has not been the soft the copyediting, typesetting, pagination and proofreading process, which may lead to differences between this version and the <u>Version of Record</u>. Please cite this article as <u>doi:</u> 10.1002/aenm.201801027.

principles calculations. We demonstrate that Auger recombination is responsible for the exceptionally high third-order recombination coefficient observed in experiment. We attribute the large Auger coefficient to a coincidental resonance between the band gap and interband transitions to a complex of higher-lying conduction bands. Additionally, we find that the distortions of PbI<sub>6</sub> octahedra contribute significantly to the high Auger coefficient, offering potential avenues for materials design.

### 1. Introduction

Halide perovskites comprise a group of materials with the chemical formula ABX<sub>3</sub>, in which the A-site cation is either a metallic element or an organic molecule, the B-site is occupied by a metallic element and X is a halogen anion such as I<sup>-</sup>, Br<sup>-</sup>, and Cl<sup>-</sup>. Methylammonium lead iodide (MAPbl<sub>3</sub>, MA=CH<sub>3</sub>NH<sub>3</sub>)<sup>[1]</sup> is the archetypal member of this family, where the A-site molecule (MA<sup>+</sup>) sits in a lattice of Pbl<sub>6</sub> octahedra (see **Figure 1**). These materials have attracted widespread attention as candidates for affordable and efficient photovoltaics; within a few years reported power conversion efficiencies have risen from 3% to over 20%, <sup>[2-4]</sup> and a worldwide effort to improve the conversion efficiency of these materials is still underway.

Given the high solar conversion efficiency, detailed balance in the Shockley-Queisser formulation suggests that radiative recombination will be efficient.<sup>[5]</sup> Halide perovskites should therefore also make good light emitters, and light-emitting diodes (LEDs) have indeed been fabricated<sup>[6]</sup> and have been shown to cover the entire visible spectrum.<sup>[7]</sup> However, the operation of LEDs requires much higher carrier densities (typically around 10<sup>18</sup> cm<sup>-3</sup>)<sup>[8]</sup> compared to photovoltaics, where the carrier

density is fundamentally limited by the availability of solar radiation. At these higher carrier densities, nonradiative recombination mechanisms might play a much more important role than in solar cells. The prospect of making efficient LEDs based on halide perovskites thus hinges on the behavior of carrier recombination at higher carrier densities.

Higher-order recombination processes play an important role in determining the quantum efficiency of an LED. Under typical LED operating conditions, the non-equilibrium densities of electrons (n) and holes (p) can be assumed to be equal. The internal quantum efficiency (IQE) is then described by:

$$IQE = \frac{k_2 n^2}{k_1 n + k_2 n^2 + k_3 n^3} \,, \tag{1}$$

where  $k_1$ ,  $k_2$ , and  $k_3$  represent the mono-, bi- and trimolecular recombination coefficients respectively. For MAPbI<sub>3</sub>, peak IQEs of greater than 70% have been achieved. <sup>[6,9]</sup> The IQE peaks around  $n = 10^{16}$  cm <sup>3</sup> and falls off rapidly as carrier density increases; the fall-off is due to the trimolecular recombination dominating at higher carrier densities. Transient spectroscopy and photoluminescence <sup>[9,13]</sup> measurements have obtained trimolecular recombination coefficients ranging from  $5.4 \times 10^{-29}$  to  $1.6 \times 10^{-28}$  cm <sup>6</sup>s <sup>-1</sup>. While strategies to mitigate the efficiency fall-off via device design have shown promise, <sup>[14]</sup> a fundamental understanding of the underlying recombination mechanism and additional avenues for materials design are still needed.

In this paper we set out to determine from first principles whether Auger recombination can explain the observed efficiency loss at high carrier densities. Auger is a trimolecular process in which the energy released by electron-hole recombination promotes a third charge carrier to an excited state. This process is nonradiative, as the excess energy of the excited carrier is lost to phonons. If that

third charge carrier is an electron, the Auger process is called an electron-electron-hole (eeh) process; in case it is a hole, it is called a hole-hole-electron (hhe) process.

All of the traditional semiconductors with band gaps higher than 1 eV exhibit Auger coefficients C around  $10^{-50} \, \mathrm{cm}^6 \mathrm{s}^{-1}$ . The measured  $k_3$  coefficients in MAPbI $_3$  are two orders of magnitude higher than the Auger coefficients C in other materials with similar band gaps, prompting the question whether Auger is actually the responsible mechanism. Other mechanisms (such as carrier leakage) can lead to large  $k_3$  values, as illustrated by investigations on the more widely studied nitride-based LEDs. Our first-principles calculations allow us to examine whether the Auger process is really so much stronger than in traditional semiconductors, and what the underlying mechanisms are.

We use first-principles methods (Sec. 2) to compute the Auger recombination coefficient in MAPbl<sub>3</sub>, and investigate its relationship with key features in the band structure. We find that the unexpectedly high Auger coefficient in MAPbl<sub>3</sub> originates from unique features in its band structure induced by large spin-orbit coupling (SOC)<sup>[17]</sup> (Sec. 3.1). We also find that *k*-space splitting of the band edges significantly enhances Auger recombination, and that this splitting is correlated with structural distortions (Sec. 3.2). It turns out distortions can be engineered by strain or by alloying, resulting in a suppression of Auger recombination. In this spirit, we search for other perovskite iodides that minimize the degree of internal distortion, thus identifying promising candidates for higher-efficiency light emitters. Finally, we discuss how the Auger effect of MAPbl<sub>3</sub> compares with other common semiconductors (Sec. 3.3), and demonstrate that the experimentally observed third-order recombination coefficient is indeed due to Auger recombination.

### 2. Methodology

Fully *ab initio* calculations of Auger recombination rates have recently been developed and applied to III-V semiconductors. <sup>[18]</sup> Our calculations of eigenvalues and wavefunctions are based on density functional theory (DFT) <sup>[19,20]</sup> and norm-conserving pseudopotentials as implemented in the Quantum ESPRESSO package <sup>[21]</sup> A plane-wave energy cutoff of 100 Ry along with a  $6 \times 6 \times 6$  k-point grid were used in the calculations of structure and charge density. We use the local density approximation (LDA) for the exchange-correlation functional. To account for the LDA underestimation of the band gap, the conduction-band energies are shifted relative to the valence bands (commonly referred to as a scissors shift). The overall shape of the scissors-shifted band structure agrees well with the quasiparticle band structure <sup>[22]</sup> at a fraction of the computational cost.

The large SOC and lack of inversion symmetry lead to non-collinear spins. The spin-orbit interactions are included via a perturbing Hamiltonian ( $\Delta H_{SOC}$ ) constructed using the vector part of the *ab initio* pseudopotentials. <sup>[23]</sup> The corrections to the spin-degenerate eigenvalues are obtained by diagonalizing  $\Delta H_{SOC}$  in the spin-degenerate basis. To ensure that the spinor wavefunctions can be represented as a linear combination of the spin-degenerate wavefunctions we included 40 unoccupied conduction bands in our band structure.

Each state in the band structure can be labeled by a general state index  $\mathbf{l} \equiv [\mathbf{k}, m]$ , where  $\mathbf{k}$  is the crystal momentum in reciprocal space and m is the band index. A  $20 \times 20 \times 20$  k-space grid was used for the calculations of the Auger rates. The Auger rate is given by Fermi's golden rule: [18]

where I = 1, 2, 3, 4 represent the four single-particle states involved in the Auger process,  $f_I$  are

Fermi occupation factors, and the  $\delta$  function enforces energy conservation. The matrix element  $M_{1234}$  is the anti-symmetrized screened-Coulomb matrix element:

$$\langle \psi_1 \psi_2 | W | \psi_3 \psi_4 \rangle - \langle \psi_1 \psi_2 | W | \psi_4 \psi_3 \rangle , \tag{3}$$

computed from the single-particle wavefunctions  $\psi_1$ . If we assume equal densities of electrons and holes, we can define an Auger coefficient as  $C = R_{\text{Auger}}/n^3$ . The matrix elements are nonzero only if momentum is conserved (i.e.,  $\mathbf{k}_1 + \mathbf{k}_2 = \mathbf{k}_3 + \mathbf{k}_4$ ).

In our calculations of the Auger coefficients for the eeh  $(C_n)$  and hhe  $(C_p)$  processes, we treat the scissors-shifted band gap as an adjustable parameter to model the effect of alloying MAPbI<sub>3</sub> with other materials and to better understand the interplay between the Auger coefficient and features in the band structure. Results for MAPbI<sub>3</sub> itself are obtained at the experimental band-gap value of 1.60 eV.

### 3. Results and Discussions

The low-temperature ground-state phase of MAPbI<sub>3</sub> is orthorhombic (Pnma), where the PbI<sub>6</sub> octahedra are significantly tilted and deformed. At slightly above room temperature (327 K), MAPbI<sub>3</sub> undergoes a transition to the cubic phase ( $Pm\overline{3}m$ ). <sup>[25]</sup> In our simulations we focus on this cubic phase with a 12-atom unit cell. While the overall cell shape is cubic, atomic relaxation leads to significant deviations from the ideal perovskite positions (see Figure 1). Using the Pb atom as the reference point at the center of the cubic unit cell, we find that the three iodine atoms are displaced 0.28, 0.39 and 0.43. Å from their face-centered positions, and such internal distortions lead to an effective Rashba splitting, <sup>[26]</sup> which significantly modifies the band structure near the band edges and

breaks the spin degeneracy. This splitting can be observed in the band structure of the relaxed unit cell shown in **Figure 2**.

The states near the conduction-band minimum (CBM) have predominantly Pb-*p* character, and the valence-band maximum (VBM) states predominantly I-*p* character. When SOC is included, the six spin-degenerate bands near the CBM at R split into two bands at the band edge and four bands at 1.29 and 1.46 eV above the CBM, and the band gap changes from a direct gap at R to a slightly indirect transition between states slightly off R. These key features of our band structure agree well with the quasiparticle band structure of Gao et al. [22] The quasiparticle band structures of the orthorhombic and tetragonal phases have been calculated by other groups but the much larger computational cost of studying Auger recombination in these larger-unit-cell phases is beyond our current capabilities.

We choose 10<sup>18</sup> cm<sup>3</sup> as a typical carrier density for an LED. At this density, the initial states are restricted to the portion of the Brillouin zone near the band extrema around R. Since Auger recombination must conserve energy and momentum, the process will be strong if final states are available with energies approximately one band gap away from the band edges. Such states (labeled as **4** in Figure 2) are clearly available in the MAPbI<sub>3</sub> band structure, for both the eeh and hhe processes.

At the experimental band gap of 1.60 eV, we obtain Auger coefficients of  $C_n = 2.7 \times 10^{-29}$  cm<sup>6</sup>s<sup>-1</sup> and  $C_p = 4.6 \times 10^{-29}$  cm<sup>6</sup>s<sup>-1</sup>. These values are two orders of magnitude larger than Auger coefficients in semiconductors with similar band gaps. [15] We now explore the physical mechanisms responsible for this enhancement.

### 3.1. Coincidental resonance

For the hhe process, an array of valence bands is available that can serve as final states for Auger recombination, explaining the high  $C_p$  value (4.6×10<sup>-29</sup> cm<sup>6</sup>s<sup>-1</sup>). For the eeh process, **Figure 3b)** shows our calculated Auger coefficient as a function of band gap. This plot is obtained by computing  $C_n$  as a function of the scissors-adjusted gap, while keeping the matrix elements in Equation 2 fixed. While changing the band gap can be considered a rough approximation to alloying MAPbl<sub>3</sub> with other materials, simulation of alloys is not our primary goal. Our main focus is to elucidate the mechanisms responsible for the high Auger coefficient in this material. If Auger transitions are restricted to the first two conduction bands (CB1 and CB2) (see Figure 3a)), the computed Auger coefficient falls off rapidly as a function of band gap—a behavior similar to intraband eeh processes in conventional direct-gap semiconductors. [29] If transitions to the higher-lying four bands (CB3-CB6) are included the Auger coefficient is dramatically increased, and shows a distinct maximum when the band gap is equal to the energy difference between CB1-CB2 and the higher-lying conduction bands (CB3-CB6) (Figure 3b)); this happens to occur very close to the band gap of MAPbl<sub>3</sub>, where  $C_n$  is enhanced by three orders of magnitude relative to the case where transitions to the higher-lying conduction bands would not occur. We conclude that most of the high eeh Auger recombination rate observed in MAPbI<sub>3</sub> can be attributed to the coincidental resonance of the band gap with interband transitions to a complex of higher-lying conduction bands. We note that a similar resonance was observed in InAs, and has been a focus of band-structure engineering aimed at suppressing the Auger recombination.[30]

### 3.2. Effects of lattice distortions on Auger

Spin-orbit coupling not only leads to the splitting of the conduction bands that results in the enhancement of the eeh Auger rate, but (in combination with a breaking of inversion symmetry) it also causes a splitting of states near the band extrema. [31] We will see this splitting also has a distinct effect on the Auger coefficients.

The CBM and VBM of MAPbl<sub>3</sub> are each comprised of two spinor states. When the Pbl<sub>6</sub> octahedra are undistorted (by fixing the Pb atom at the center of the unit cell, and the iodine atoms at the ideal face-center positions), the bands at the CBM and VBM are degenerate. When the atoms are allowed to relax, the bands split into two bands. Most noticeably, the internal distortions lead to a linear-*k* splitting of the band edges, which directly influences the distribution of states involved in the Auger process.

A schematic of how the CBM changes due to structural distortion is shown in **Figure 4**. In the case of undistorted (ideal) Pb and I positions, the VBM and CBM are both at the high-symmetry R point. Structural relaxations lead to a linear-*k* splitting, which in turn results in a ring of states around R. The band edge of the relaxed structure has a higher dimensionality, and thus many more states available for the Auger process. Therefore, at the same carrier density, each of the states at the band edge for the relaxed structure will have a lower quasi-Fermi occupation factor than in the ideal structure. This is evident in the fact that the quasi-Fermi level is lower for electrons (and higher for holes) in the relaxed atomic configuration than in the ideal structure.

To examine the distributions of band-edge states that participate in Auger recombination, we can compute the extent of the region in the Brillouin zone occupied by electrons or holes. **Table 1** shows results for % BZ corresponding to a volume in which 99% of the electrons(holes) reside, for the case

of a carrier density of  $10^{18}$  cm<sup>-3</sup>. The table shows that in the ideal structure the charge carriers are much more concentrated near the R point, making it significantly harder to simultaneously satisfy energy and momentum conservation.

The Auger coefficients versus band gap for the ideal and relaxed structures are shown in **Figure 5**.

The Auger coefficient is clearly significantly lower for the ideal structure. The Auger coefficients at the experimental band gap of 1.60 eV are listed in Table 1. The concentration of charge carriers near the R point causes the eeh Auger coefficient for the ideal structure to be 92% lower than in the relaxed structure; the hhe Auger coefficient experiences a similar drop, by 86%. These Auger coefficients for the ideal structure are close to the value of ≈10<sup>-30</sup> cm<sup>6</sup>s<sup>-1</sup> that seems to be a lower limit for Auger coefficients, as observed across a wide range of materials spanning a large range of band gaps.

The connection between distortions and higher Auger coefficient is evident. Schemes for controlling the octahedral distortion have been proposed, such as using anisotropic strain<sup>[32]</sup> or alloying with other halide perovskites. <sup>[33]</sup> Atomic substitutions can of course have other effects on the band structure; still, looking for materials with lower internal distortions can be a useful criterion in the search for materials with lower Auger coefficients.

The degree of distortion of the perovskite octahedra can be characterized by the variance of the angles subtended by the bonds at the Pb atom:<sup>[34]</sup>

$$\sigma_{\theta(\text{oct})}^2 = \frac{1}{11} \sum_{i=1}^{12} (\theta_i - 90^\circ)^2 . \tag{4}$$

We have computed the bond-angle variance  $\sigma^2_{ heta(\mathrm{oct})}$  for a number of inorganic and hybrid iodide

perovskites. The results, shown in **Figure 6**, show a clear trend with the size of the cations: smaller distortions occur for larger A-site cations as well as for smaller B-site cations. A similar general trend is observed as a function of tolerance factor: the tolerance factor increases for larger A-site cations as well as for smaller B-site cations, and materials with larger tolerance factors tend to have smaller distortions. We feel that the bond-angle variance provides a more direct measure of the distortions. A complete investigation of the distortion of different types of halide perovskites is beyond the scope of the present work. However, we note that the structural parameters of different halide perovskites can be obtained by simple calculations or from existing materials databases, and can serve as a useful starting point for screening of promising light-emitting materials. The large range of octahedral distortions shown by the halide perovskites, as illustrated in **Figure 6**, allows for using the distortion as a tuning parameter in materials design.

### 3.3. Implications for device efficiency

We now discuss the impact of the Auger coefficient on the efficiency of LEDs. At the experimental band gap of 1.60 eV, the combined Auger coefficient (eeh+hhe) from our calculations is  $7.3\times10^{-29}$  cm<sup>6</sup>s<sup>-1</sup> for the relaxed structure and  $8.6\times10^{-30}$  cm<sup>6</sup>s<sup>-1</sup> for the ideal structure. In **Figure 7** we plot the IQE as a function of the carrier density n (**Equation 1**) using our calculated Auger coefficient as  $k_3$ . For the radiative recombination coefficient  $k_2$  we use a calculated value of  $8.4\times10^{-11}$  cm<sup>3</sup>s<sup>-1</sup>, [37] and for  $k_1$  the value reported by Richter et al. [9] We compare our results with an IQE curve calculated using experimentally determined recombination coefficients  $k_1 = 5\times10^6$  s<sup>-1</sup>,  $k_2 = 8.1\times10^{-11}$  cm<sup>3</sup>s<sup>-1</sup>, and  $k_3 = 1.1\times10^{-28}$  cm<sup>6</sup>s<sup>-1</sup>, obtained in Ref. [9] from fitting transient absorption (TA) measurements. In Ref. [9] it was also demonstrated this curve matched results from photoluminescence quantum yield measurements. The calculated and experimental IQE agree very well with each other, thus

confirming that the third-order recombination observed in MAPbI<sub>3</sub> is primarily due to Auger recombination.

Figure 7 indicates that Auger recombination causes the IQE of MAPbl<sub>3</sub> to drop off above a carrier density of 2.5×10<sup>17</sup> cm<sup>-3</sup>, and also reduces the peak IQE. Zou et al. [14] fabricated LEDs from two-dimensional layered perovskites and found that the efficiency fall-off occurs at lower carrier densities compared to the three-dimensional perovskites. Auger recombination thus apparently plays an even more significant role for two-dimensional perovskites. However, as discussed in Sec. 3.2 and Figure 5, Auger recombination can be dramatically reduced if lattice distortions are suppressed. This reduced Auger coefficient results in an IQE with a peak that increases from 69% to 86%, with the carrier density at peak efficiency shifting to 7.6 × 10<sup>17</sup> cm<sup>-3</sup> (Figure 7).

### 4. Conclusions

We have computed the Auger recombination coefficient of the prototypical halide perovskite, MAPbl<sub>3</sub>. Our calculations result in a total Auger coefficient (eeh+hhe) of 7.3×10<sup>-29</sup> cm<sup>6</sup>s<sup>-1</sup>, in good agreement with the third-order recombination coefficients reported by experiments, [10,11,13] confirming that Auger is the dominant loss mechanism in MAPbl<sub>3</sub> at high carrier concentrations.

The high Auger recombination coefficient for the eeh process is mainly due to the coincidental resonance of the band gap with states that are roughly one band gap away from the band edges. We also found that if the distortions in the metal-halide lattice are removed, Auger recombination can be dramatically suppressed. To aid future attempts at engineering this feature, we computed the octahedral distortions in a number of halide perovskites. In order for halide perovskites to reach quantum efficiencies comparable to those of traditional III-V semiconductor devices, materials will

have to be identified that avoid the coincidental resonance that is present in MAPbI<sub>3</sub>, and that minimize distortions of the metal-halide lattice.

# Acknowledgments

This work was supported by the U. S. Department of Energy, Office of Science, Basic Energy Sciences, under Award No. DE-SC0010689. Computational resources were provided by the National Energy Research Scientific Computing Center, a DOE Office of Science User Facility supported by the Office of Science of the U. S. Department of Energy under Contract No. DE-AC0205CH11231.

Received: ((will be filled in by the editorial staff))
Revised: ((will be filled in by the editorial staff))
Published online: ((will be filled in by the editorial staff))


### References

- [1] Z. Xiao, R. A. Kerner, L. Zhao, N. L. Tran, K. M. Lee, T.-W. Koh, G. D. Scholes, B. P. Rand, *Nat. Photonics* **2017**, *11*, 108.
- [2] A. Kojima, K. Teshima, Y. Shirai, T. Miyasaka, J. Am. Chem. Soc. 2009, 131, 6050.
- [3] H. Zhou, Q. Chen, G. Li, S. Luo, T.-B. Song, H.-S. Duan, Z. Hong, J. You, Y. Liu, Y. Yang, *Science* **2014**, *345*, 542.
- [4] N. J. Jeon, J. H. Noh, W. S. Yang, Y. C. Kim, S. Ryu, J. Seo, S. I. Seok, *Nature* **2015**, *517*, 476.
- [5] O. D. Miller, E. Yablonovitch, S. R. Kurtz, IEEE J. Photovoltaics 2012, 2, 303.
- [6] S. D. Stranks, H. J. Snaith, Nat. Nanotechnol. 2015, 10, 391.
- [7] S. Adjokatse, H.-H. Fang, M. A. Loi, *Mater. Today* **2017**, *20*, 413.


- [8] S. P. DenBaars, Solid State Luminescence, Springer Netherlands, Dordrecht, 1993.
- [9] J. M. Richter, M. Abdi-Jalebi, A. Sadhanala, M. Tabachnyk, J. P. Rivett, L. M. Pazos-Out ón, K. C. Gödel, M. Price, F. Deschler, R. H. Friend, *Nat. Commun.* **2016**, *7*, 13941.
- [10] J. Fu, Q. Xu, G. Han, B. Wu, C. H. A. Huan, M. L. Leek, T. C. Sum, Nat. Commun. 2017, 8, 1300.
- [11] C. Wehrenfennig, G. E. Eperon, M. B. Johnston, H. J. Snaith, L. M. Herz, *Adv. Mater.* **2014**, *26*, 1584.
- [12] Y. Yang, M. Yang, Z. Li, R. Crisp, K. Zhu, M. C. Beard, J. Phys. Chem. Lett. 2015, 6, 4688.
- [13] R. L. Milot, G. E. Eperon, H. J. Snaith, M. B. Johnston, L. M. Herz, *Adv. Funct. Mater.* **2015**, *25*, 6218.
- [14] W. Zou, R. Li, S. Zhang, Y. Liu, N. Wang, Y. Cao, Y. Miao, M. Xu, Q. Guo, D. Di, L. Zhang, C. Yi, F. Gao, R. H. Friend, J. Wang, W. Huang, *Nat. Commun.* **2018**, *9*, 608.
- [15] K. A. Bulashevich, S. Yu. Karpov, Phys. Status Solidi C 2008, 5, 2066.
- [16] J. Piprek, Phys. Status Solidi A 2010, 207, 2217.
- [17] J. Even, L. Pedesseau, J.-M. Jancu, C. Katan, J. Phys. Chem. Lett. 2013, 4, 2999.
- [18] E. Kioupakis, D. Steiauf, P. Rinke, K. T. Delaney, C. G. Van de Walle, *Phys. Rev. B* **2015**, *92*, 035207
- [19] P. Hohenberg, W. Kohn, *Phys. Rev.* **1964**, *136*, B864.
- [20] W. Kohn, L. J. Sham, Phys. Rev. 1965, 140, A1133.
- [21] P. Giannozzi, S. Baroni, N. Bonini, M. Calandra, R. Car, C. Cavazzoni, D. Ceresoli, G. L. Chiarotti, M. Cococcioni, I. Dabo, A. Dal Corso, S. de Gironcoli, S. Fabris, G. Fratesi, R. Gebauer, U. Gerstmann, C. Gougoussis, A. Kokalj, M. Lazzeri, L. Martin-Samos, N. Marzari, F. Mauri, R. Mazzarello, S. Paolini, A. Pasquarello, L. Paulatto, C. Sbraccia, S. Scandolo, G. Sclauzero, A. P. Seitsonen, A. Smogunov, P. Umari, R. M. Wentzcovitch, *J. Phys. Condens. Matter* 2009, *21*, 395502.
- [22] W. Gao, X. Gao, T. A. Abtew, Y.-Y. Sun, S. Zhang, P. Zhang, Phys. Rev. B 2016, 93, 085202.

- [23] M. S. Hybertsen, S. G. Louie, Phys. Rev. B 1986, 34, 2920.
- [24] A. M. A. Leguy, P. Azarhoosh, M. I. Alonso, M. Campoy-Quiles, O. J. Weber, J. Yao, D. Bryant, M. T. Weller, J. Nelson, A. Walsh, M. van Schilfgaarde, P. R. F. Barnes, *Nanoscale* **2016**, *8*, 6317.
- [25] M. T. Weller, O. J. Weber, P. F. Henry, A. M. Di Pumpo, T. C. Hansen, *Chem. Commun.* **2015**, *51*, 4180.
- [26] X. Zhang, Q. Liu, J.-W. Luo, A. J. Freeman, A. Zunger, Nat. Phys. 2014, 10, 387.
- [27] M. R. Filip, C. Verdi, F. Giustino, J. Phys. Chem. C 2015, 119, 25209.
- [28] F. Brivio, K. T. Butler, A. Walsh, M. van Schilfgaarde, Phys. Rev. B 2014, 89, 155204.
- [29] D. Steiauf, E. Kioupakis, C. G. Van de Walle, ACS Photonics 2014, 1, 643.
- [30] I. P. Marko, Z. Batool, K. Hild, S. R. Jin, N. Hossain, T. J. C. Hosea, J. P. Petropoulos, Y. Zhong, P. B. Dongmo, J. M. O. Zide, S. J. Sweeney, *Appl. Phys. Lett.* **2012**, *101*, 221108.
- [31] M. Kepenekian, J. Even, J. Phys. Chem. Lett. 2017, 8, 3362.
- [32] L. Leppert, S. E. Reyes-Lillo, J. B. Neaton, J. Phys. Chem. Lett. 2016, 7, 3683.
- [33] J.-H. Lee, N. C. Bristowe, J. H. Lee, S.-H. Lee, P. D. Bristowe, A. K. Cheetham, H. M. Jang, *Chem. Mater.* **2016**, *28*, 4259.
- [34] K. Robinson, G. V. Gibbs, P. H. Ribbe, Science 1971, 172, 567.
- [35] V. M. Goldschmidt, Naturwissenschaften 1926, 14, 477.
- [36] A. Jain, S. P. Ong, G. Hautier, W. Chen, W. D. Richards, S. Dacek, S. Cholia, D. Gunter, D. Skinner, G. Ceder, K. a. Persson, *APL Materials* **2013**, *1*, 011002.
- [37] X. Zhang, J.-X. Shen, W. Wang, C. G. Van de Walle, 2018.




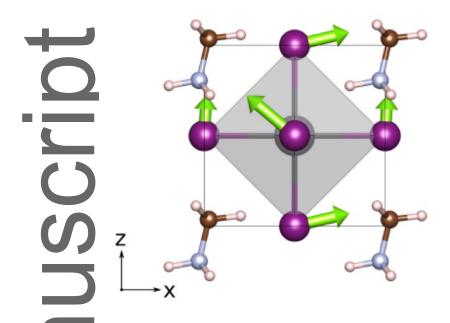

**Figure 1**. 12 atom unit cell of MAPbI<sub>3</sub> where the I atoms are at the ideal face-center positions. The arrows indicate displacement of the I atoms upon relaxation within a cubic cell shape. For clarity the length of the displacement vector is enhanced by a factor of five.

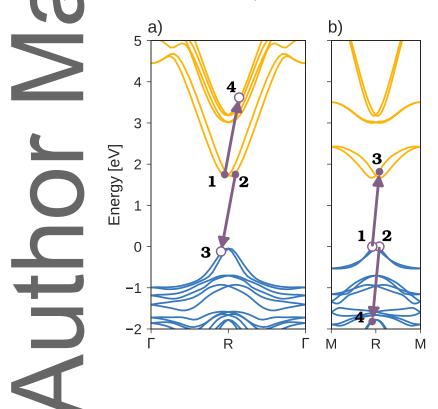


**Figure 2**. Band structure of MAPbI<sub>3</sub> including SOC, with the gap adjusted to the experimental value, plotted along the a)  $R \rightarrow \Gamma$  and b)  $R \rightarrow M$  directions. Auger recombination events for the eeh a) and hhe b) processes are indicated.

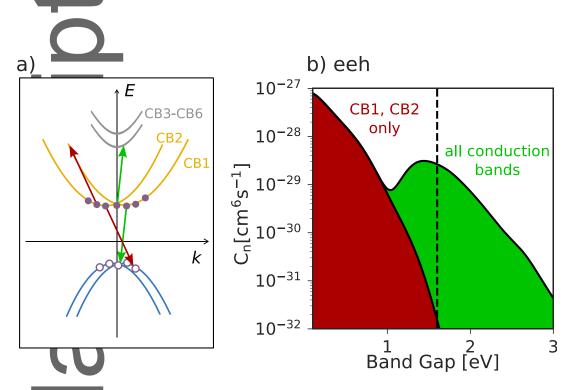


**Figure 3.** a) Schematic of Auger processes involving only the CB1-CB2 bands vs. processes with transitions to the CB3-CB6 bands. b) Computed Auger coefficients as a function of scissors-adjusted band gap at a carrier density  $n = 10^{18}$  cm<sup>-3</sup>, for processes restricted to CB1-CB2 versus processes with transitions to all conduction bands bands. The dashed line represents the experimental band gap of 1.60 eV.




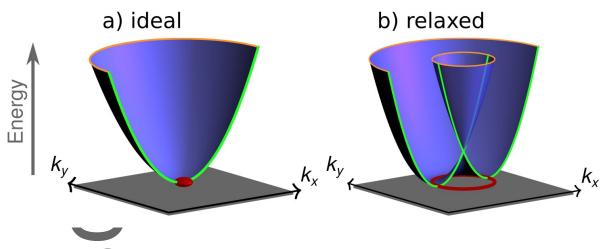

**Figure 4.** Schematic of the CBM energy dispersion of MAPbI<sub>3</sub> near the R point for a) the ideal and b) the relaxed structure. The band-edge states are shown in red.

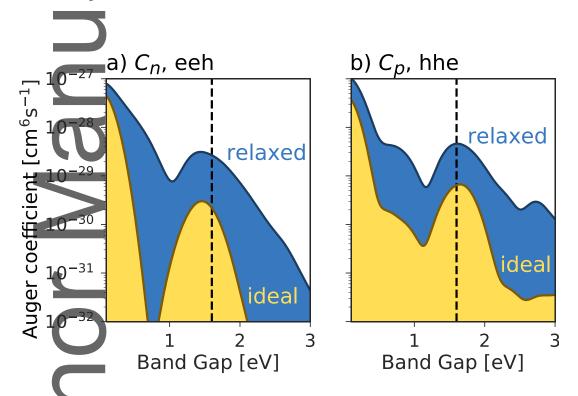


**Figure 5**. a) eeh and b) hhe Auger coefficients vs. scissors-shifted band gap for the ideal and relaxed structures.

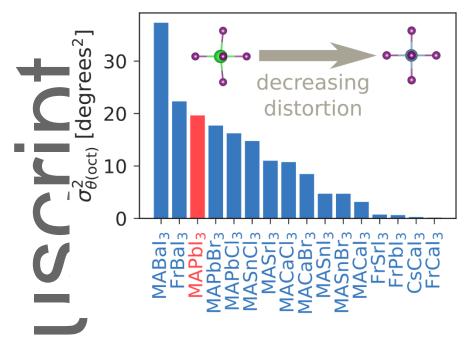

**Figure 6**. Bond-angle variance of several inorganic and hybrid halide perovskites. The calculations were done using LDA assuming the cubic phase.

# Author Ma

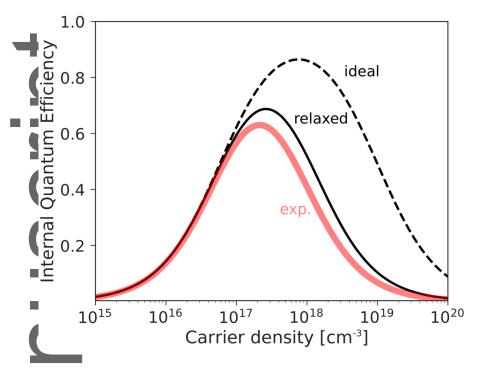

**Figure 7.** Internal quantum efficiency calculated as a function of carrier density (Equation 1) using  $k_3$  values corresponding to our calculated Auger coefficients for the relaxed (solid curve) and ideal (dashed black curve) perovskite structures, and compared to experimental values.



**Table 1.** Quasi-Fermi level  $\mu_F$  (referenced to the CBM/VBM) and extent of Brillouin-zone filling (% BZ) for electrons/holes, for ideal and relaxed atomic configurations of MAPbI<sub>3</sub>. The sign of  $\mu_F$  is positive in case of degenerate doping for electrons (Fermi level above the CBM), and negative in case of degenerate doping for holes (Fermi level below the VBM). The computed Auger coefficients ( $C_{n/p}$ ) are also listed. All values are obtained for a carrier density of  $10^{18}$  cm<sup>-3</sup>.

Carrier	Structure	$\mu_{ m F}$	% BZ	$C_{n/p}$
	10	[eV]		$[\mathrm{cm}^6\mathrm{s}^{\text{-1}}]$
electrons	ideal	28.9	0.2	2.2 × 10 <sup>-30</sup>
	relaxed	-15.7	0.6	2.7 × 10 <sup>-29</sup>
holes	ideal	-26.2	0.3	4.6 × 10 <sup>-30</sup>
	relaxed	30.3	0.8	6.5 × 10 <sup>-29</sup>

### Table of contents entry:

The unexpectedly high third-order recombination coefficient in halide perovskites is identified to stem from Auger recombination. First-principles calculations show that the large Auger coefficient originates from a coincidental resonance as well as from distortions in the metal-halide lattice. These insights point to avenues for improved materials design.

Keyword: DFT calculations, Auger recombination, halide perovskite, light-emitting diode

Jimmy-Xuan Shen, Xie Zhang\*, Suvadip Das, Emmanouil Kioupakis, and Chris G. Van de Walle\*

Title Unexpectedly Strong Auger Recombination in Halide Perovskites

