

CHROM. 3468

## GAS CHROMATOGRAPHIC SEPARATION OF LOW MOLECULAR WEIGHT FLUOROCARBONS

ROBERT N. BRIGHT AND RICHARD A. MATULA\*

*Fluid Dynamics Laboratory, Department of Mechanical Engineering, College of Engineering, The University of Michigan, Ann Arbor, Mich. (U.S.A.)*

(Received February 19th, 1968)

## SUMMARY

Application of gas-solid chromatography techniques to the separation of low molecular weight fluorocarbons incorporates a number of advantages over previous analysis techniques. These advantages include isothermal operation up to 200°, elimination of substrate bleed, stability of the base line, minimum retention times and convenience. The relative retention volumes with respect to perfluoroethane of a number of low molecular weight fluorocarbons as a function of column support material and operating conditions are reported. The separation of a number of important species which are formed during the thermal oxidation of low molecular weight fluorocarbons are also discussed.

## INTRODUCTION

The qualitative and quantitative analysis of low molecular weight fluorocarbon mixtures has many applications including analysis of various fluorocarbon refrigerants, quality control of certain aerosol products and kinetic studies related to the thermal decomposition of fluorocarbons. TATLOW and co-workers<sup>1-5</sup> have employed gas chromatography techniques for the analysis and preparative separation of a number of perfluorinated and almost perfluorinated cyclohexanes, cyclohexenes and benzenes. REED<sup>6</sup> has studied the chromatography of perfluoroalkanes, C<sub>5</sub>F<sub>12</sub>, C<sub>6</sub>F<sub>14</sub> and C<sub>7</sub>F<sub>16</sub> on a range of stationary phases. SERPINE<sup>7</sup> has considered the separation of a number of fluoro- and fluorochlorocarbons. Unfortunately the perfluorinated compounds were eluted rapidly and they were followed by compounds containing at least one other atom which were retained and resolved. CAMPBELL AND GUDZINOWICZ<sup>8</sup> have reported the separation of various fluorocarbons and sulfur fluoride compounds. GREEN AND WACHI<sup>9</sup> concluded that Kel-F oils were not completely satisfactory for the separation of fluorocarbons. The results of GREEN AND WACHI<sup>9</sup> indicated that a number of low boiling point fluorocarbons could be separated by temperature programming a silica gel column or by maintaining a Chromosorb W column employing CH<sub>2</sub>=CHCO<sub>2</sub>CH<sub>2</sub>-(CF<sub>2</sub>CF<sub>2</sub>)<sub>3</sub>H (courtesy of E.I. duPont de Nemours and Co., Wilmington, Delaware) as the liquid substrate at 0°. Recently

\* Present address: Department of Mechanical Engineering, Drexel Institute of Technology, Philadelphia, Pa. (U.S.A.).

DRENNAN AND MATULA<sup>10</sup> have reported that carbon dioxide and carbonyl fluoride mixtures can be separated on a composite Porapak (Waters Associate, Inc.) column. The purpose of the present paper is to report the relative retention times of a number of low molecular weight fluorocarbons on Porapak columns, and to extend the use of Porapak columns for the analysis of the products of combustion of low molecular weight fluorocarbons.

## EXPERIMENTAL

### *Apparatus and reagents*

An Aerograph model No. 202-B gas chromatograph employing a thermal conductivity detector was used for this study. Mixtures were introduced into the gas chromatograph through a gas sampling valve used in conjunction with a 2 ml sample volume. The chromatograph was equipped with a linear temperature programmer which was capable of maintaining isothermal column operation in the temperature range 30 to 400°.

The fluorocarbons utilized in this study were obtained from a number of sources. The perfluoromethane (CF<sub>4</sub>), perfluoroethane (C<sub>2</sub>F<sub>6</sub>) and a mixture of *cis*- and *trans*-C<sub>4</sub>F<sub>8</sub>-2 were purchased from the Matheson Company, East Rutherford, New Jersey. The 2-trifluoromethylpropene (C<sub>4</sub>F<sub>10</sub>), perfluorobutane (C<sub>4</sub>F<sub>10</sub>), perfluorobutadiene-1,3 (C<sub>4</sub>F<sub>6</sub>), perfluorobutyne-2 (C<sub>4</sub>F<sub>6</sub>), perfluorocyclobutene (c-C<sub>4</sub>F<sub>6</sub>), perfluorocyclobutane (c-C<sub>4</sub>F<sub>8</sub>), perfluoropropane (C<sub>3</sub>F<sub>8</sub>), and perfluoropropene (C<sub>3</sub>F<sub>6</sub>) were purchased from Penninsular Chemresearch, Inc., Gainesville, Florida. The perfluoroethylene (C<sub>2</sub>F<sub>4</sub>) and carbonyl fluoride (CF<sub>2</sub>O) were purchased from Columbia Organic Chemicals, Inc., Columbia, South Carolina. The iso-C<sub>4</sub>F<sub>8</sub> used in this study was produced by pyrolyzing perfluoropropene at 700° for 15 min in a Vycor reactor.

### *Procedure*

A number of variable length GSC columns were constructed by packing 1/4 in. O.D. copper tubing with 50/80 mesh Porapak (Waters Associate, Inc.). The separation capabilities of Types N, P, Q, R, S and T Porapak were studied. Before final instillation in the chromatograph, each of the columns was heated to 200° and purged with helium (60 ml/min) for two hours. Prior to the analysis of the fluorocarbon combustion products, the column was conditioned by passing three 250 torr samples of CF<sub>2</sub>O through it. The retention volumes of all compounds were determined from the analysis of both pure compounds and fluorocarbon mixtures that had been prepared in the laboratory. The separations were obtained by operating the columns isothermally in the temperature range 75 to 175° while maintaining a constant helium carrier gas flow rate of 60 ml/min.

## RESULTS AND DISCUSSION

### *Fluorocarbon analysis*

The relative retention volumes of the various fluorocarbon compounds as a function of column material, length and temperature are listed in Tables I-IV. All of these results are based on a helium carrier gas flow rate of 60 ml/min. If the relative retention volume of a compound is not listed in the Tables the retention time was

TABLE I

RELATIVE RETENTION VOLUMES OF SEVERAL FLUOROCARBONS ON PORAPAK TYPE T  
 $C_2F_6 = 1.00$ . Helium carrier gas flow rate: 60 ml/min; column material: 50/80 mesh.

Compound	6 ft. at 100°		6 ft. at 150°		6 ft. at 175°		10 ft. at 150°		10 ft. at 175°	
	$t_m^a$	RRV <sup>b</sup>	$t_m$	RRV	$t_m$	RRV	$t_m$	RRV	$t_m$	RRV
Air	0.70	0.49	0.65	0.68	0.66	0.82	1.03	0.64	1.03	0.70
CF <sub>4</sub>	0.82	0.57	0.71	0.74	0.66	0.82	1.17	0.72	1.13	0.77
C <sub>2</sub> F <sub>6</sub>	1.44	1.00	0.96	1.00	0.81	1.00	1.62	1.00	1.47	1.00
C <sub>2</sub> F <sub>4</sub>	1.91	1.33	1.09	1.14	0.92	1.14	1.89	1.17	1.68	1.14
C <sub>3</sub> F <sub>8</sub>	3.53	2.45	1.55	1.62	1.19	1.47	2.73	1.67	2.21	1.50
CF <sub>3</sub> -C=C-CF <sub>3</sub>	5.91	4.10	1.92	2.00	1.39	1.72	3.51	2.17	2.75	1.87
C <sub>3</sub> F <sub>6</sub>	6.61	4.59	2.10	2.19	1.47	1.82	3.84	2.37	2.96	2.01
c-C <sub>4</sub> F <sub>8</sub>	10.5	7.36	2.90	3.02	1.94	2.39	5.40	3.33	3.90	2.65
CF <sub>3</sub> -CF <sub>2</sub> -CF <sub>2</sub> -CF <sub>3</sub>	10.6	7.36	2.90	3.02	1.94	2.39	5.40	3.33	3.90	2.65
trans-C <sub>4</sub> F <sub>8-2</sub>	16.9	11.74	3.50	3.65	2.18	2.69	6.48	4.00	4.98	3.39
cis-C <sub>4</sub> F <sub>8-2</sub>	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	7.30	4.51	n.a.	n.a.
c-C <sub>4</sub> F <sub>6</sub>	18.0	12.50	3.95	4.12	2.44	3.01	7.45	4.60	5.02	3.42
CF <sub>2</sub> =CF-CF=CF <sub>2</sub>	22.3	15.49	4.55	4.74	2.73	3.37	8.60	5.31	5.63	3.83
iso-C <sub>4</sub> F <sub>8</sub>	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	10.4	6.42	n.a.	n.a.
CF <sub>3</sub> -C=CF <sub>2</sub>   CF <sub>3</sub>	—	—	8.08	8.42	4.55	5.62	15.4	9.51	9.25	6.29

<sup>a</sup>  $t_m$  = Retention time in minutes to peak.

<sup>b</sup> RRV = Relative retention volume with respect to perfluoroethane.

TABLE II

RELATIVE RETENTION VOLUMES OF SEVERAL FLUOROCARBONS ON PORAPAK TYPE N  
 $C_2F_6 = 1.00$ . Helium carrier gas flow rate: 60 ml/min; column material: 50/80 mesh.

Compound	5 ft. at 100°		5 ft. at 150°		10 ft. at 175°	
	$t_m^a$	RRV <sup>b</sup>	$t_m$	RRV	$t_m$	RRV
Air	0.60	0.49	0.58	0.76	1.17	0.81
CF <sub>4</sub>	0.71	0.58	0.58	0.76	1.17	0.81
C <sub>2</sub> F <sub>6</sub>	1.22	1.00	0.76	1.00	1.44	1.00
C <sub>2</sub> F <sub>4</sub>	1.56	1.27	0.86	1.12	1.62	1.12
C <sub>3</sub> F <sub>8</sub>	2.87	2.35	1.19	1.57	2.03	1.41
CF <sub>3</sub> -C=C-CF <sub>3</sub>	4.62	3.79	1.48	1.95	2.35	1.63
C <sub>3</sub> F <sub>6</sub>	4.99	4.09	1.57	2.07	2.95	2.05
c-C <sub>4</sub> F <sub>8</sub>	7.84	6.13	2.15	2.83	3.13	2.17
CF <sub>3</sub> -CF <sub>2</sub> -CF <sub>2</sub> -CF <sub>3</sub>	8.44	6.92	2.24	2.93	3.13	2.17
trans-C <sub>4</sub> F <sub>8-2</sub>	12.53	10.27	2.56	3.37	3.46	2.40
cis-C <sub>4</sub> F <sub>8-2</sub>	n.a.	n.a.	n.a.	n.a.	3.70	2.57
c-C <sub>4</sub> F <sub>6</sub>	12.53	10.27	2.83	3.72	3.90	2.71
CF <sub>2</sub> =CF-CF=CF <sub>2</sub>	16.2	13.28	3.29	4.33	4.35	3.02
iso-C <sub>4</sub> F <sub>8</sub>	n.a.	n.a.	n.a.	n.a.	4.65	3.23
CF <sub>3</sub> -C=CF <sub>2</sub>   CF <sub>3</sub>	—	—	5.90	7.76	7.32	5.08

<sup>a</sup>  $t_m$  = Retention time in minutes to peak.

<sup>b</sup> RRV = Relative retention volume with respect to perfluoroethane.

TABLE III

RELATIVE RETENTION VOLUMES OF SEVERAL FLUOROCARBONS ON PORAPAK TYPES R AND S  
 $C_2F_6 = 1.00$ . Helium carrier gas flow rate: 60 ml/min; column material: 50/80 mesh.

Compound	Type R 6 ft. at 100°		Type R 6 ft. at 150°		Type S 6 ft. at 100°		Type S 6 ft. at 150°	
	$t_m^a$	RRV <sup>b</sup>	$t_m$	RRV	$t_m$	RRV	$t_m$	RRV
Air	0.85	0.57	0.86	0.80	0.80	0.57	0.75	0.75
CF <sub>4</sub>	0.95	0.64	0.86	0.80	0.90	0.64	0.80	0.80
C <sub>2</sub> F <sub>6</sub>	1.48	1.00	1.07	1.00	1.41	1.00	1.00	1.00
C <sub>2</sub> F <sub>4</sub>	1.86	1.26	1.17	1.10	1.71	1.21	1.10	1.12
C <sub>3</sub> F <sub>8</sub>	3.00	2.03	1.54	1.44	2.98	2.11	1.42	1.42
CF <sub>3</sub> -C=C-CF <sub>3</sub>	4.30	2.91	1.81	1.69	2.98	2.11	1.42	1.42
C <sub>3</sub> F <sub>6</sub>	4.33	2.93	1.80	1.68	4.19	2.97	1.70	1.70
c-C <sub>4</sub> F <sub>8</sub>	6.88	4.65	2.39	2.23	6.90	4.89	2.30	2.30
CF <sub>3</sub> -CF <sub>2</sub> -CF <sub>2</sub> -CF <sub>3</sub>	7.56	5.11	2.57	2.40	7.63	5.41	2.45	2.45
trans-C <sub>4</sub> F <sub>8-2</sub>	8.80	5.95	2.57	2.40	8.80	6.24	2.45	2.45
c-C <sub>4</sub> F <sub>8</sub>	9.62	6.50	2.87	2.68	9.98	7.08	2.70	2.70
CF <sub>2</sub> =CF-CF=CF <sub>2</sub>	12.30	8.31	3.31	3.09	12.5	8.86	3.20	3.20
CF <sub>3</sub> -C=CF <sub>2</sub>   CF <sub>3</sub>	—	—	6.10	5.70	—	—	5.69	5.69

<sup>a</sup>  $t_m$  = Retention time in minutes to peak.

<sup>b</sup> RRV = Relative retention volume with respect to perfluoroethane.

TABLE IV

RELATIVE RETENTION VOLUMES OF SEVERAL FLUOROCARBONS ON PORAPAK TYPE Q  
 $C_2F_6 = 1.00$ . Helium carrier gas flow rate: 60 ml/min; column material: 50/80 mesh.

Compound	Type Q 6 ft. at 100°		Type Q 6 ft. at 150°	
	$t_m^a$	RRV <sup>b</sup>	$t_m$	RRV
Air	0.79	0.52	0.83	0.75
CF <sub>4</sub>	0.90	0.60	0.85	0.77
C <sub>2</sub> F <sub>6</sub>	1.51	1.00	1.11	1.00
C <sub>2</sub> F <sub>4</sub>	1.74	1.15	1.22	1.10
C <sub>3</sub> F <sub>8</sub>	3.32	2.20	1.56	1.51
CF <sub>3</sub> -C=C-CF <sub>3</sub>	4.55	3.01	1.80	1.73
C <sub>3</sub> F <sub>6</sub>	4.20	2.78	1.95	1.76
c-C <sub>4</sub> F <sub>8</sub>	7.49	4.96	2.81	2.53
CF <sub>3</sub> -CF <sub>2</sub> -CF <sub>2</sub> -CF <sub>3</sub>	n.a.	n.a.	n.a.	n.a.
trans-C <sub>4</sub> F <sub>8-2</sub>	n.a.	n.a.	n.a.	n.a.
c-C <sub>4</sub> F <sub>8</sub>	n.a.	n.a.	n.a.	n.a.
CF <sub>2</sub> =CF-CF=CF <sub>2</sub>	n.a.	n.a.	n.a.	n.a.
CF <sub>3</sub> -C=CF <sub>2</sub>   CF <sub>3</sub>	n.a.	n.a.	n.a.	n.a.

<sup>a</sup>  $t_m$  = Retention time in minutes to peak.

<sup>b</sup> RRV = Relative retention volume with respect to perfluoroethane.

greater than 25 min, and a notation of n.a. implies that a compound was not tested. Poropak Type P does not effectively separate the compounds of interest and hence results for this column are not listed. A ten foot column of Poropak Type T maintained at  $150^{\circ}$  was found to be the most effective for the separation of a mixture containing air and a large number of low molecular weight fluorocarbons. A GSC chromatogram of a complex, gaseous fluorocarbon mixture obtained with the aid of a ten foot, Poropak Type T column is shown in Fig. 1. The column temperature was maintained at  $150^{\circ}$  and the separation was completed in approximately 17 min. The perfluorocyclobutane and perfluorobutane were not resolved on this column.

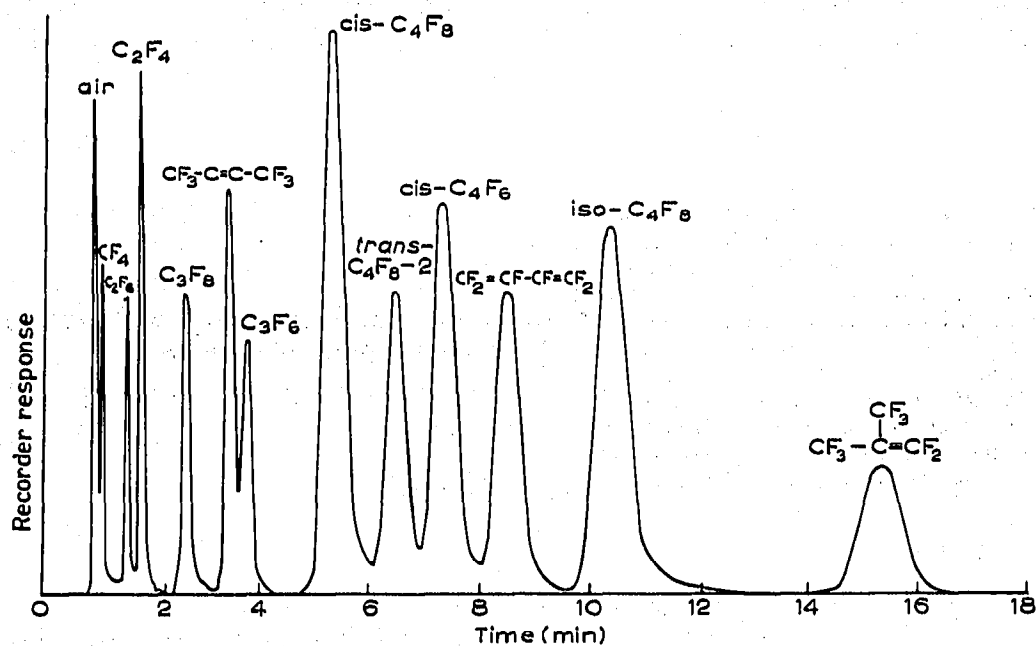


Fig. 1. Gas-solid chromatogram of fluorocarbons.

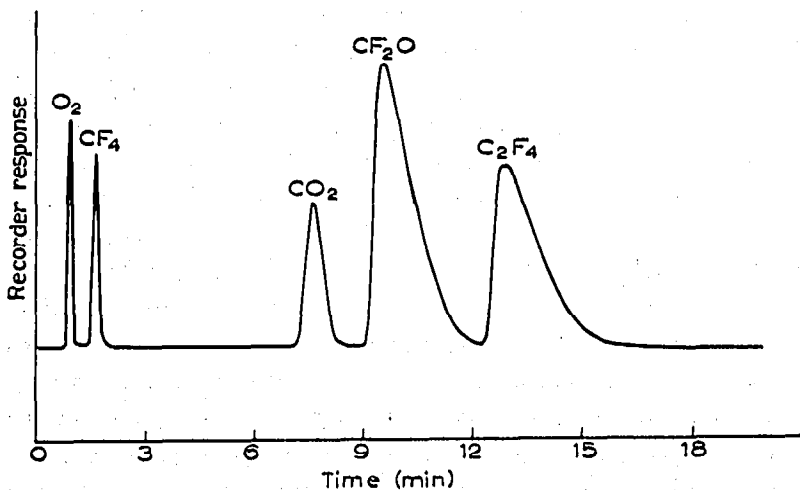


Fig. 2. Typical chromatogram of  $C_2F_4$  oxidation products.

### Fluorocarbon combustion products

The major equilibrium products associated with fluorocarbon combustion include  $O_2$ ,  $CF_4$ ,  $CO_2$ ,  $CF_2O$  and  $C_2F_4$ . A GSC chromatogram of these compounds obtained with the aid of a six foot composite column consisting of two feet of 50/80 mesh Poropak type T followed by four feet of 50/80 mesh Poropak N is shown in Fig. 2. The column temperature was maintained at  $23^\circ$  and the helium carrier gas flow rate was 60 ml/min.

### ACKNOWLEDGEMENT

This research was sponsored by the Air Force Office of Scientific Research, Office of Aerospace Research, United States Air Force, under Grant Number AF-AFOSR-1144-67.

### REFERENCES

- 1 D. EVANS AND J. TATLOW, *J. Chem. Soc.*, (1955) 1184.
- 2 J. GODSELL, M. STACEY AND J. TATLOW, *Nature*, 178 (1956) 199.
- 3 R. STEPHENS AND J. TATLOW, *Chem. Ind. (London)*, (1957) 821.
- 4 R. SMITH AND J. TATLOW, *J. Chem. Soc.*, (1957) 2505.
- 5 D. EVANS AND J. TATLOW, in D. H. DESTY (Editor), *Vapour Phase Chromatography, Proceedings of the First Symposium, London, June, 1956*, Academic Press, New York, 1957, p. 256.
- 6 T. M. REED, *Anal. Chem.*, 30 (1958) 221.
- 7 J. SPERPINET, *Chim. Anal. (Paris)*, 41 (1959) 146.
- 8 R. CAMPBELL AND B. GUDZINOWICZ, *Anal. Chem.*, 33 (1961) 842.
- 9 S. GREEN AND F. WACHI, *Anal. Chem.*, 35 (1963) 928.
- 10 G. A. DRENNAN AND R. A. MATULA, *J. Chromatog.*, 34 (1968) 77.

*J. Chromatog.*, 35 (1968) 217-222