

National Accident Sampling System

Special Studies Number Three

Steering Column

Users' Guide
and
Coding Manual

Thomas L. McDole, Ph.D.

Highway Safety Research Institute
The University of Michigan
Ann Arbor, Michigan 48109

April 1979

Technical Report Documentation Page

1. Report No. UM-HSRI-79-22	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle National Accident Sampling System; Special Studies Number 3: Steering Column, Users Guide and Coding Manual		5. Report Date April 1979	
		6. Performing Organization Code	
7. Author(s) Thomas L. McDole, Ph.D.		8. Performing Organization Report No. UM-HSRI-79-22	
9. Performing Organization Name and Address Highway Safety Research Institute The University of Michigan Ann Arbor, Michigan 48109		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. DOT-HS-7-01805	
12. Sponsoring Agency Name and Address National Highway Traffic Safety Administration U.S. Department of Transportation Washington, D.C. 20590		13. Type of Report and Period Covered Task Final 10/01/78 - 4/30/79	
		14. Sponsoring Agency Code	
15. Supplementary Notes			
<p>16. Abstract</p> <p>This Users' Guide describes the National Accident Sampling System (NASS) Special Studies data collection project number three: Steering Column.</p> <p>Contained herein is the necessary information and instructions to describe the vehicle's passenger compartment steering system and to record the nature and extent of the damage to it following involvement in a crash.</p>			
17. Key Words Crash; Steering Column; Measurement; Data Recording; Coding; Data Form; Accident Investigation		18. Distribution Statement	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 55	22. Price

CONTENTS

Purpose	1
Steering System Defined	1
Organization of the Data Form	1
Reference Guide and Example of Compiled Reference Table	2
Note on the Use of Code 5 or 95	9
Case Selection	9
Additional Documentation--Photographic	10
Supplemental Information	10
Data Recording	10
Variable Coding and Description	11
Vehicle Identification	11
Steering System Optional Equipment	12
Steering Wheel: Device	15
Damage	19
Steering Column: Device	25
Compression	28
Column Displacement	35
Foundation and Surrounding Structure Damage	46
Field Data Form	50

STEERING COLUMN

Purpose

The purpose of this Special Study is to gather data on the performance of the steering system components located within the passenger compartment when the vehicle is involved in a collision.

Steering System Defined

The steering system is defined as the portion of the steering assembly that is located within the passenger compartment, consisting of the following components/subsystems.

1. The column, extending from the toe pan to its termination in the steering wheel hub.
2. Associated mounting brackets, hardware, and foundation.
3. Associated energy-absorbing devices.
4. The steering wheel.

Organization of the Data Form

For purposes of this data collection, the passenger compartment steering system has been classified into four major subsystems: (1) Wheel; (2) Column; (3) Column Mounting; (4) Foundation.

The Wheel (1) consists only of the rim, spokes, and hub. The Column (2) consists of the steering column, housing jacket, energy-absorbing device, and the toe plate (if any). The column extends from the toe pan (toe plate) at the firewall to the shaft end where the wheel hub attaches. The Mounting (3) consists of the brackets, shear module, clamps, etc., used to attach the column to the foundation or vehicle. The mounting brackets are attached to the column. The Foundation (4) consists of those surfaces or devices to which the column mounting devices are fastened so as to secure the column in the vehicle. These surfaces are typically the instrument panel, toe pan, or other vehicle substructure.

The data form is organized to allow identification and description of these subsystems (Wheel, Column, Mounting, Foundation) and to permit recording of observed damage to each subsystem.

Tabular data accompanying each of the descriptive variables permit ready identification and coding of the device type. However, to further facilitate correct description of the item, compiled reference data have been provided under separate cover. This reference document is described in the following section.

REFERENCE GUIDE AND EXAMPLE OF COMPILED REFERENCE TABLE

Introduction

The Reference Guide has been developed to allow the investigator to accurately describe the passenger compartment steering system and to serve as a guide when making observations and measurements.

The Reference Guide is divided into two parts. Part I, containing Reference Table 1, summarizes the components of the passenger compartment steering system for most vehicles of interest. It is organized by Make, Model, and Model Year. Part II, containing Reference Tables 2-7, provides data about each component of this steering system. Reference Table 1 is a summary of Tables 2-7 for specific vehicles.

Use of Reference Tables

The reference tables are organized for use in two ways. The first table gives the pertinent data in summary for the common makes and models. Proper use requires that the investigator identify the make, model, and optional equipment for a certain vehicle, locate that vehicle in Reference Table 1, and then transfer the appropriate data values to the data form while verifying that the vehicle is so equipped.

The second set of tables gives the code values for each specific element of the data form, so that uncommon steering systems not contained in the summary tables may be described. These tables also describe how to make and record certain measurements.

The use of the summary tables is strongly encouraged, because many of the features of a steering system are not readily identifiable by examining a vehicle.

When a data value is not listed in Reference Table 1, or is otherwise indicated, the investigator must examine the vehicle to correctly identify or describe the component.

REFERENCE TABLES

- RT-1 Compiled Steering Components by Make, Model, Model Year
- RT-2 Wheel Code
- RT-3 Wheel Profile
- RT-4 Wheel EA Type Code
- RT-5 Column EA Device Type
- RT-6 Column Mounting Method
- RT-7 AC Dimension Reference Points

Reference Table 1: Compiled Steering Components

Year 1983 Make NHTSA



Series Name (Ref. Table)	Body Style	VIN Body Code*	Opt. Strg. Eqpt.	STEERING WHEEL			COLUMN			AC DIMENSION		
				Wheel Code (2)	Profile (3)	Wheel EA Code (4)	EA Orig. Dimen. (1)	EA Device Type (5)	Mounting Method (6)	EA Orig. Dimen. (7)	Ref. Point Value (7)	
Standard 203	2 dr.	31	Std.	22	2	01	998	11	6	8.5	1	66
	4 dr.	32	Std.	22	2	01	998	11	6	8.5	1	69
	S Wagon	33	Std.	22	2	01	998	11	6	8.5	1	112
Delux 203	2 dr.	41	Std.	31	2	01	998	11	6	8.5	1	66
	4 dr.	42	Tilt	41	2	01	998	41	4	7.0	1	66*
	4 dr.	42	Std.	31	2	01	998	11	6	8.5	1	67
	4 dr.	42	Tilt	41	2	01	998	41	4	7.0	1	69*
	S Wagon	43	Std.	31	2	01	998	11	6	8.5	1	112
Luxury	4 dr. HT	53	Tilt/Tel.	41	2	01	998	41	4	7.0	1	112*
	4 dr. HT	53	Tilt/Tel.	11	3	01	998	16	5	5.5	1	998
Sports	2 dr.	76	Tilt/Tel. Speed	11	3	01	998	17	5	6.5	1	998
	2 dr.	76	Tilt/Tel. Speed	43	1	37	4.5"	01	3	998	1	998

*VIN Body Code:
4th & 5th characters of VIN
 x x etc.
 1 2 3 4 5 6

*with tilt wheel at center position

A B C D E F G H I J K L M

Ref. Table 2--Wheel Code

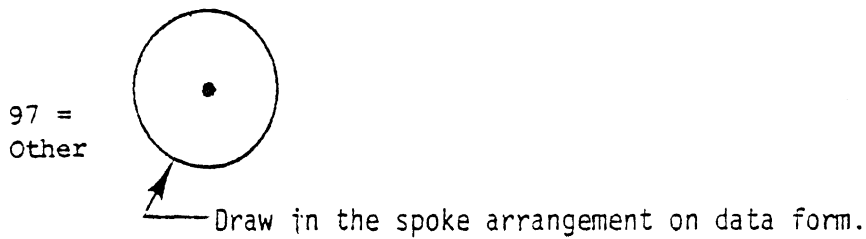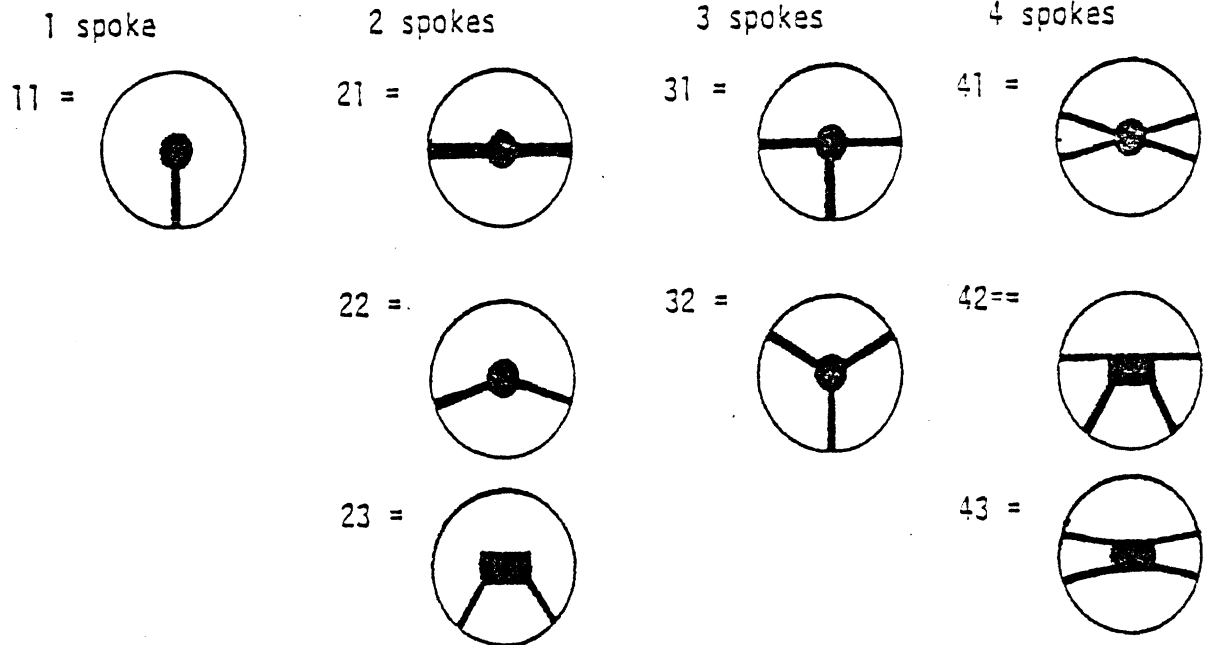

99 - Unknown spokes and arrangement

Ref. Table 3--Wheel Profile


1. Deep dish
2. Shallow dish
3. Flat
4. Other profile*
5. Undetermined - no reference data
9. Unknown profile

*Note on data form.

Ref. Table 4--Wheel EA Type Code

01	Non EA Type*
02	EA Type--Unspecified
21	Dodge Omni
31	Plymouth Horizon
95	Undetermined--no reference data
99	Unknown if EA Wheel













*While most wheels are designed to absorb some energy (but are not called EA wheels), certain wheels are specifically EA and replace the column EA capability.

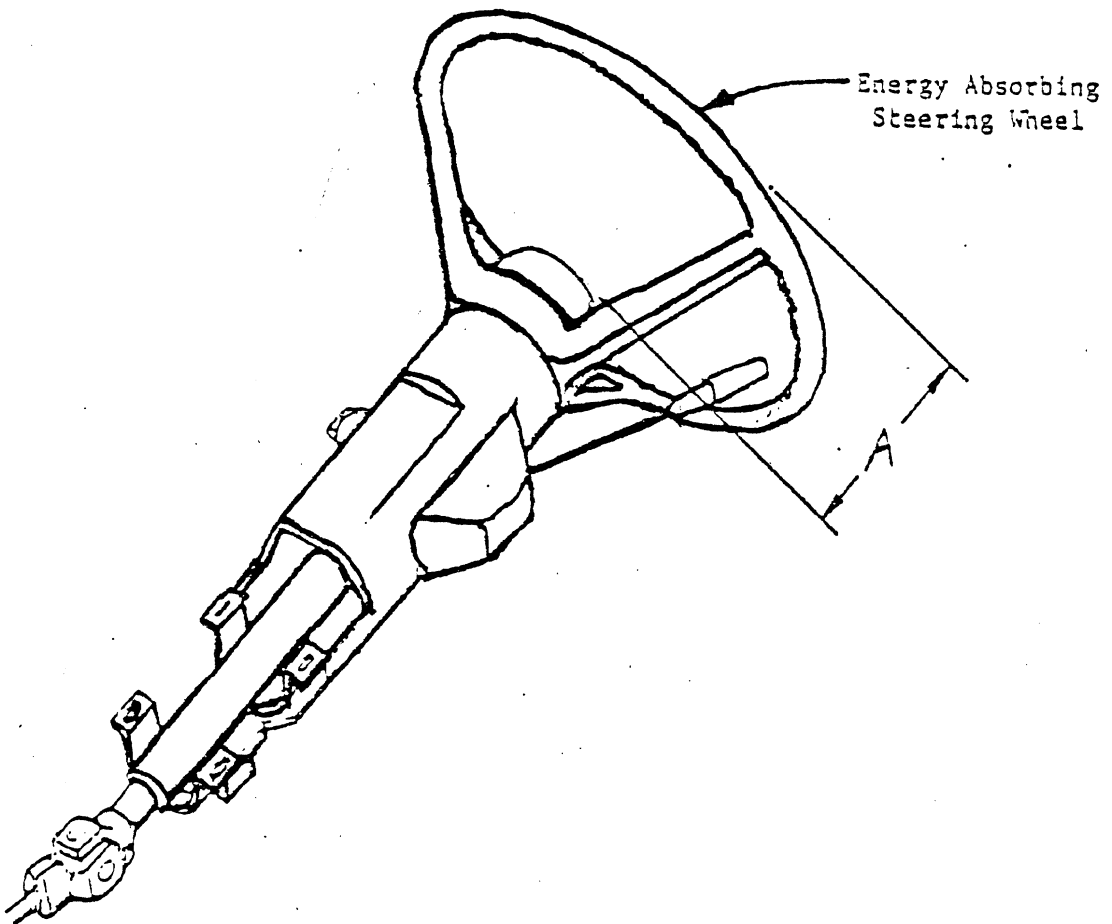

Ref. Table 5--Column EA Device Type

STEERING COLUMN
ENERGY ABSORBING DEVICES

- 01 Non EA Column
- 02 EA Column Type Unspecified

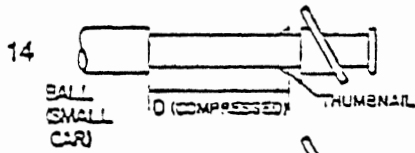

FRONT OF VEHICLE


- 90 Other EA Column Type--Note on data forms
- 99 Unknown if EA Column
- 95 Undetermined--no reference data

Ref. Table 6--Column Mounting Method

- 1 Rigid to Instrument Panel and Toe Pan/Lower Firewall
- 2 Rigid to Instrument Panel, Lower Bracket
- 3 Rigid to Instrument Panel, No Lower Attachment
- 4 Shear Module at Instrument Panel, Rigid at Toe Pan/Lower Firewall
- 5 Shear Module at Instrument Panel, Lower Bracket
- 6 Shear Module at Instrument Panel, No Lower Attachment
- 7 Bracket
- 8 Other (specify on data form)
- 9 Unknown Method
- 0 Undetermined--no reference data

Ref. Table 7--AC Dimension Reference Points

Measurement to bottom edge of upper back lite trim at glass.

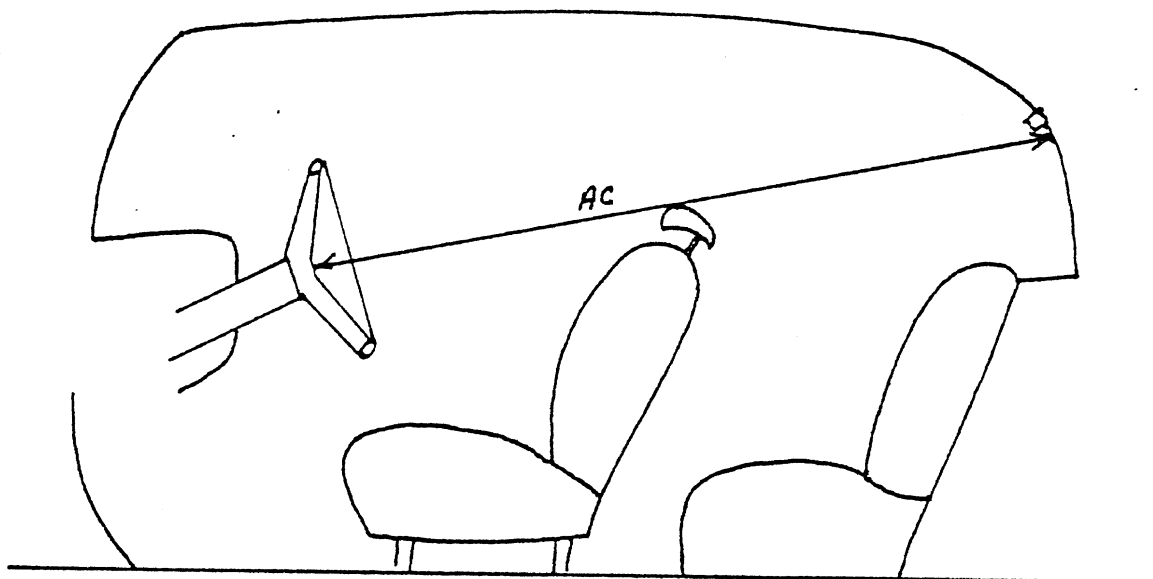

Code: 1 - back light glass header

- NOTE:
- (1) If adjustable Headrest, measurement is with headrest down.
 - (2) If high back seat, measurement is over top of seat back.
 - (3) Vehicles with no back seat, measurement is still taken to window trim.

NOTE ON THE USE OF CODE 5* or 95

All possible effort has been made to ascertain the correct entries for the Compiled Reference Table. In certain instances, values are not available and thus the notation 5 or 95 is used to indicate the unavailability.

When such a value is noted, the investigator should make every effort to ascertain the correct value for the variable (as defined in the individual reference tables) by inspection of the vehicle. This value, obtained by inspection, should be placed on the data form in place of the value 5 or 95. Only when, by inspection, the correct value cannot be ascertained should the code values 5 or 95 be placed on the data form.

Case Selection

The basic case selection criteria are the same for this study as for the NASS Vehicle Selection.

This special study is to be completed whenever this vehicle has met the initial NASS sample selection, was a towaway, and the initial crash event involved a frontal or side collision. EXCLUDE initial rear impacts (CDC clock directions 04-08) and exclude rollovers.

Any variation or additional criteria that affect individual PSU's or the above described case selection will be provided by NHTSA.

*In certain instances 5 is a valid code and hence a substitute value has been listed.

Additional Documentation -- Photographic

The data form is designed to be a response-only data form with no additional drawing or sketching required.

However, to facilitate a complete understanding of the damage pattern, take at least two photographs of the steering column, wheel, energy-absorbing (EA) device, etc., to best depict the location and magnitude of the damage. Photograph the mounting and foundation also, if damaged.

Supplemental Information

Additional notes, supplemental drawings, etc., are extremely valuable in understanding unusual situations. Such notation should be placed on the data form or supplemental paper as necessary. Extra pictures, brief descriptions, etc., are encouraged and should be included in the Special Studies documentation.

Data Recording

The data form is designed for ease of data recording by the field investigator. Only a check mark or investigator-supplied numeric value is needed. Provision is made in the lower right hand corner of each variable (or group of related variables) for subsequent coding by a data editor. See example below.

AC Dimension Axial Movement Calculation

24. AC Original Dimension

_____ inches -- Code actual value form
Table of Compiled Steering Components.
___(995) Undetermined--no reference
data -- Code "not applicable"
for Question 25. Complete
Question 27.
___(998) Not applicable--reference
data available -- Code "not
applicable" for Questions
25 and 27.
___(999) Unknown, not measurable --
Code "unknown" for Questions
25 and 27.

44 45 46

To increase understanding of the coding, the element (codes) values have been separated from the element (code) structure IN THIS DOCUMENT ONLY.

VARIABLE CODING AND DESCRIPTION

VARIABLE GROUP: Form Identification

VARIABLE NAME: 1-5. Form Header and Case Identification

FORMAT: 11 columns, numeric, beginning column 1*

ELEMENT VALUES: 1. Primary Sampling Unit Number
2. Case Number
3. Special Study Number
4. Record Number
5. Vehicle Number

SOURCE: Vehicle Forms

REMARKS: This information is obtained from the VEHICLE FORM.

*See data form for layout.

VARIABLE GROUP: Steering System Optional Equipment

VARIABLE NAME: 6. Speed Control

FORMAT: 1 column, numeric, beginning column 12

ELEMENT VALUES: 1 Equipped
 2 Not Equipped
 9 Unknown

SOURCE: Inspection only

REMARKS: A factory-installed (Original Equipment Manufacturer) speed control may affect the steering column EA device type and/or dimension.

This variable is restricted to only OEM speed controls. After-market devices are not to be included (even if dealer installed).

VARIABLE GROUP: Steering System Optional Equipment

VARIABLE NAME: 7. Tilt Column Feature

FORMAT: 1 column, numeric, beginning column 13

ELEMENT VALUES: 1 Equipped
 2 Not Equipped
 9 Unknown

SOURCE: Inspection only

REMARKS: The tilt column feature can affect the steering column EA device type and/or dimensions, or affect other dimensional properties related to the steering system.

VARIABLE GROUP: Steering System Optional Equipment

VARIABLE NAME: 8. Telescoping Column Feature

FORMAT: 1 column, numeric, beginning column 14

ELEMENT VALUES: 1 Equipped
 2 Not Equipped
 9 Unknown

SOURCE: Inspection only

REMARKS: The telescoping column feature can affect the steering column EA device type and/or dimensions, or affect other dimensional properties related to the steering system.

VARIABLE GROUP: Steering Wheel: Device

VARIABLE NAME: 9,. Wheel Configuration

FORMAT: 2 columns, numeric, beginning column 15

ELEMENT VALUES: ___ __: Code actual value from those listed in the Table of
Compiled Steering Componenets* or from those shown below.

95 Undetermined--no reference data

97 Other: Sketch configuration in the space provided
on the reverse side

99 Unknown spokes and arrangement

SOURCE: Inspection

Compiled Reference Table*



Reference Table

REMARKS: Code the number of spokes and their arrangement. Check the wheel visually and compare the number and arrangement of the spokes with the value given in the Compiled Reference Table.* Insert the correct value.

If code 95 is indicated in the Compiled Reference Table, the wheel should be visually inspected to identify the spokes and arrangement. If the wheel is an after-market type, note here and on variable 10. Sketch, describe, and photograph the after-market wheel.

*Compiled Reference Table issued separately.

Reference Table -- Wheel Configuration

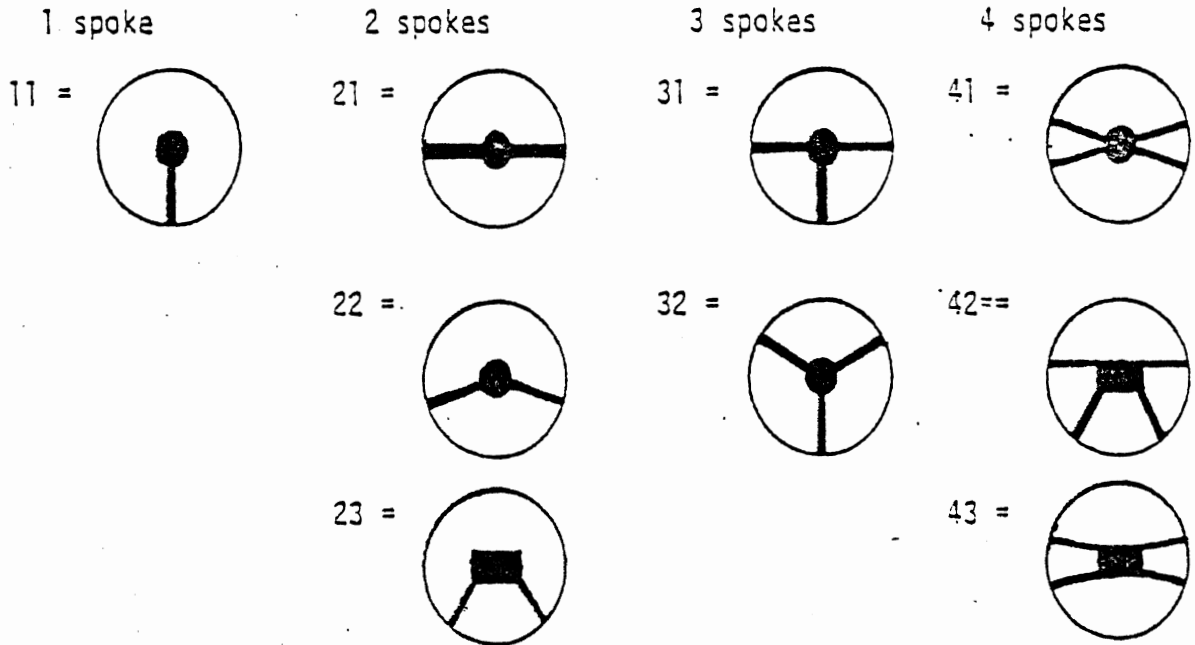

Draw in the spoke arrangement on data form.

99 - Unknown spokes and arrangement

VARIABLE GROUP: Steering Wheel: Device

VARIABLE NAME: 10. Wheel Profile

FORMAT: 1 column, numeric, beginning column 17

ELEMENT VALUES: 1 Deep dish
2 Shallow dish
3 Flat
4 Other profile:

5 Undetermined--no reference data

9 Unknown profile

SOURCE: Inspection

Compiled Reference Table

Reference Table - individual

REMARKS: Code the wheel profile. Check the wheel visually and compare the profile of the wheel with the value given in the Compiled Reference Tables. Insert the correct value.

If code 5 is indicated in the Compiled Reference Table, visually inspect the wheel to identify the profile.

If the wheel is an after-market type, note on the data form (see variable 9).

VARIABLE GROUP: Steering Wheel: Device

VARIABLE NAME: 11. Wheel Energy Absorbing (EA) Type Code

FORMAT: 2 column, numeric, beginning column 18

ELEMENT VALUES: 01 Non-EA wheel:- Code "not applicable" for Questions 12-14
02 EA wheel, type unspecified: Code actual value (see
Table of Compiled Steering Components for code
applicable to your specific make, model, and model year)
90 Other: _____
95 Undetermined--no reference data: Code "unknown" for
Question 14
99 Unknown if EA wheel: Code "unknown" for Questions 12-14

SOURCE: Inspection

Compiled Reference Table

Reference Table - individual

REMARKS: While most wheels are designed to absorb some energy, certain wheels are specifically EA and replace the column EA capability. If the wheel is an energy-absorbing type, the column cannot be energy absorbing (under current vehicle design). If this variable is coded 02-95, then variable 17 "Steering Column Energy Absorbing Device" must be coded 01.

Code the wheel EA type. Check the wheel visually and compare the wheel EA type with the type given in the Compiled Reference Table. Insert the correct value.

If code 95 is indicated in the Compiled Reference Table, visually inspect the wheel energy-absorbing system to correctly identify the wheel EA type.

Additional coding instructions are given for subsequent questions, based on the response to this item.

VARIABLE GROUP: Steering Wheel: Damage

VARIABLE NAME: 12. Wheel Original Dimension

FORMAT: 3 columns, numeric, beginning column 20

ELEMENT VALUES: ___ __. ___ (tenths of inches): Code actual value from Table
of Compiled Steering Components

998 Not applicable

999 Unknown

SOURCE: Compiled Reference Table

Reference Table - individual

REMARKS: If the wheel was coded as an EA type on the previous variable (11), refer to the Compiled Reference Table to obtain the correct EA dimension value and to note the reference points for measurement.

If the value recorded for variable 11 was 01, code this variable 998.

If the value recorded for variable 11 was 02, 95, 99, code this variable 999.

VARIABLE GROUP: Steering Wheel: Damage

VARIABLE NAME: 13. Wheel Compressed Dimension

FORMAT: 3 columns, numeric, beginning column 23

ELEMENT VALUES: _____.__ (tenths of inches): Code actual measured value

998 Not applicable

999 Unknown

SOURCE: Inspection only


REMARKS: An example of an EA type wheel is shown below. The figure describes the measurement needed to obtain damage dimension. The original dimension was measured in the same manner.

If the value recorded for variable 11 was 01, code this variable 998.

If the value recorded for variable 11 was 02, 95, 99, code this variable 999.

ENERGY ABSORBING STEERING WHEEL MEASUREMENT

Example Only:
See reference manual
for different
techniques.

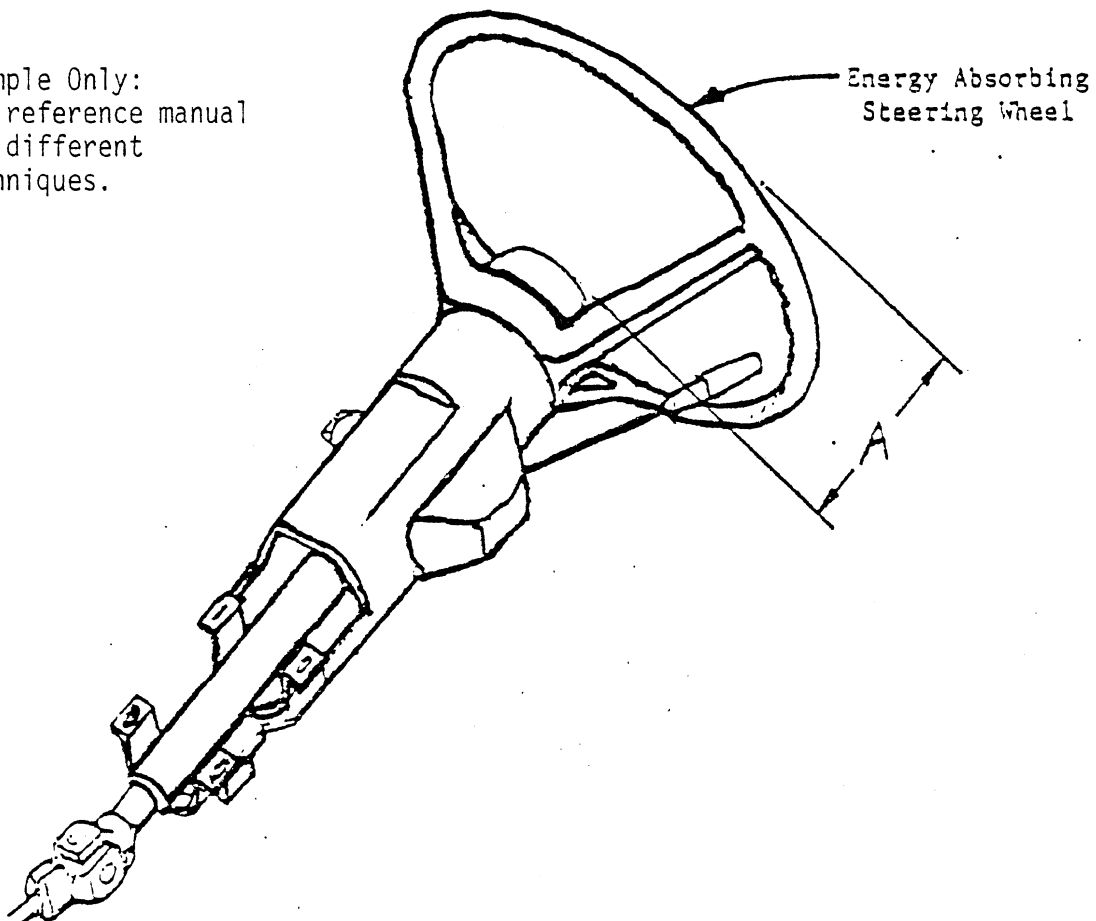

VARIABLE GROUP: Steering Wheel: Damage

VARIABLE NAME: 14. Wheel Compression Value

FORMAT: 2 columns, numeric, beginning column 26

ELEMENT VALUES: ___ ___ inches: Subtract the Question 13 value from the
Question 12 value and record the difference

00 No movement, compression, or collapse

Observed Value Code (cannot be measured):

80 Apparent movement, value undetermined

Estimated Movement:

81 Less than 1 inch

82 Between 1 and 2 inches

84 Between 2 and 4 inches

86 Between 4 and 6 inches

88 Between 6 and 8 inches

90 Greater than 8 inches

Other Codes:

98 Not applicable, not measurable

99 Unknown

SOURCE: Calculation

Inspection

REMARKS: The value for compression for the wheel EA device can be determined by subtracting the measured dimension from the original dimension. This value (rounded off to whole inches) is the distance the wheel rim moved during energy dissipation.

When variable 11 is coded 01, the correct entry here is 98.

When the entry to variable 11 is 02 or 95, then the correct response to this variable is either code 99 (unknown) or one of the Observed Value Codes.

The value for the Wheel Compression cannot be greater than the value for the original EA dimension. Once the rim has been distorted past the plane of the hub, the EA capabilities of the wheel have largely been dissipated as the rigid hub becomes exposed to the occupant. The maximum value that this variable can attain is equal to the value of the original dimension (variable 12).

While an original dimension may be unknown (and hence a calculation not possible) it may still be possible to observe and quantify the extent of the movement or displacement of the device. The Observed Value Codes are to be used whenever direct measurement is impractical or impossible but where the movement can be observed and estimated--either by eye or through the use of some other means or reference.

Code 80 is used to denote that movement exists but it cannot be quantified further.

Codes 81, 82, 84, 86, 88, and 90 describe value steps of estimated movement. The boundaries are not exact, as these are indeed estimates. Best judgment should be used in assigning a category.

Code 00 is valid in this scheme, since it may be determined that probably no movement exists--although it cannot be verified by measurement.

The use of the Observed Value Codes is preferable to 99 "unknown" because the codes do convey some information on displacement.

VARIABLE GROUP: Steering Wheel: Damage

VARIABLE NAME: 15. Rim Distortion

FORMAT: 1 column, numeric, beginning column 28

ELEMENT VALUES: 1 No distortion
2 Minor bending--less than 1 inch
3 Severe bending--greater than 1 inch
4 Broken (i.e., separated)
9 Unknown distortion

SOURCE: Inspection only

REMARKS: Place a flat object such as a clipboard across the rim and look to see if any distortion is present. If distortion is present, quantify the magnitude. A precise measurement is not needed (and probably cannot be obtained anyway). Breakage of the wheel must include separation of the rim. A fracture, cracking, or breaking of the plastic or wood material does not qualify unless there is complete separation.

VARIABLE GROUP: Steering Wheel: Damage

VARIABLE NAME: 16. Spoke Distortion

FORMAT: 1 column, numeric, beginning column 29

ELEMENT VALUES: 1 No distortion
2 Minor bending--less than 1 inch
3 Severe bending--greater than 1 inch
4 Broken (i.e., separated)
9 Unknown distortion

SOURCE: Inspection only

REMARKS: By observation and comparison, note whether the spokes of the wheel appear to be deformed. If distortion or deformation is noted, quantify the magnitude. Breakage of the spoke must include separation. A fracture, cracking, or breaking of the plastic or wood material does not qualify unless there is complete separation.

VARIABLE GROUP: Steering Column: Device

VARIABLE NAME: 17. Energy Absorbing Device Type

FORMAT: 2 columns, numeric, beginning column 30

ELEMENT VALUES: 01 Non-EA column: Code "not applicable for Questions 19-21"
02 EA column type unspecified: Code actual value. (See Table of Compiled Steering Components for code applicable to your specific make, model, and model year. Also, see those listed on reverse side.)
90 Other (sketch on reverse side): _____
95 Undetermined--no reference data: Code "unknown" for Questions 19 and 20. Complete Question 21.
99 Unknown if EA column: Code "unknown" for Questions 19-21.

SOURCE: Inspection

Compiled Reference Table


Reference Table - individual

REMARKS: Code the type of steering column energy absorbing device. Check the column visually and compare the column EA device type with the type given in the Compiled Reference Table. Insert the correct value. Subtle differences exist between some columns. Check carefully.

If code 95 is indicated in the Compiled Reference Table, visually inspect the column energy absorbing system to correctly identify the column EA device type. It is usual for a manufacturer to place the same column in each vehicle of the same make/model/body style. While variations do exist (Air Cushion Restraints, etc.) this uniformity can be put to advantage in correctly identifying the correct column.

Additional coding instructions are given for subsequent questions based on the response to this item.

If the vehicle is equipped with an energy absorbing steering column, the steering wheel cannot be energy absorbing (under current vehicle design). If this variable is coded 02-95, then variable 11 "(steering) wheel energy absorbing (EA) type code" must be coded 01.

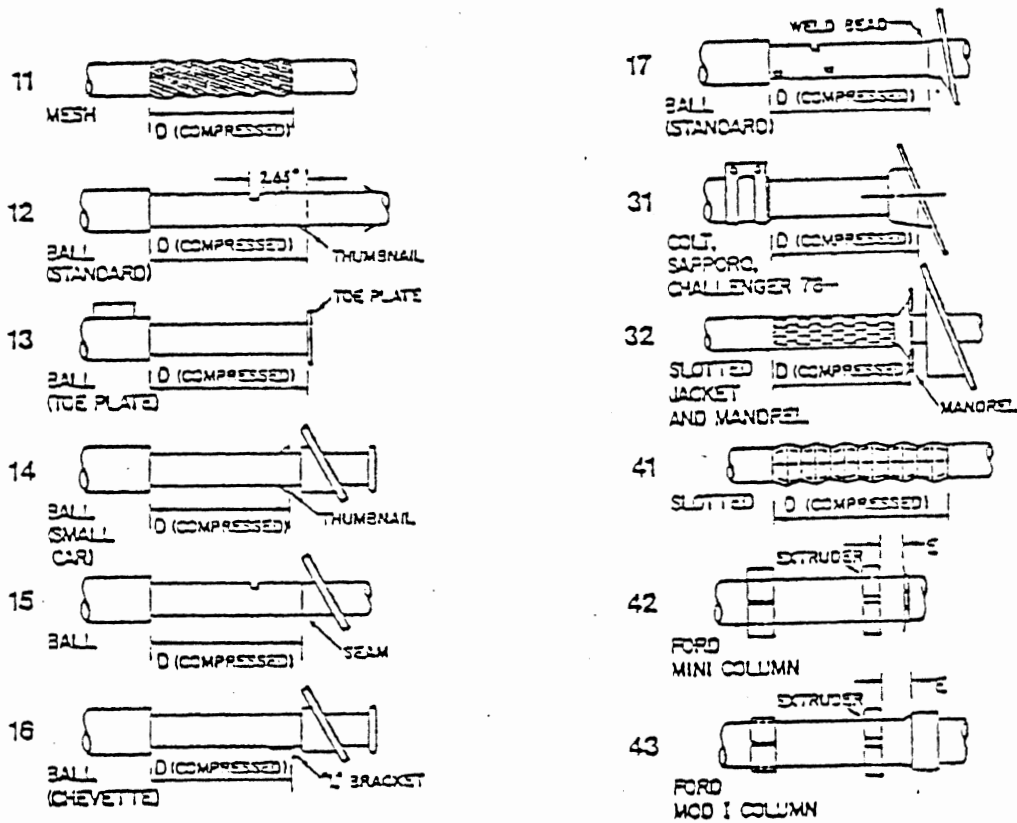

FRONT OF VEHICLE

Codes 11-29 indicate columns manufactured by GM. (Note that these columns may appear on vehicles of other than GM manufacture.) Codes 31-39 indicate columns manufactured by Chrysler Corporation. Codes 41-49 indicate columns manufactured by Ford Motor Company. (Note too that columns manufactured by Chrysler and Ford may appear on vehicles of other than their respective corporate manufacture.)

VARIABLE GROUP: Steering Column: Device

VARIABLE NAME: 18. Mounting Method

FORMAT: 1 column, numeric, beginning column 32

ELEMENT VALUES: 0 Undetermined--no reference data

Rigid to Instrument Panel:

1 Rigid at toe pan/lower firewall

2 Lower bracket

3 No lower attachment

Shear Module at Instrument Panel:

4 Rigid at toe pan/lower firewall

5 Lower bracket

6 No lower attachment

7 Bracket

8 Other: _____

9 Unknown method

SOURCE: Inspection

Compiled Reference Table

Reference Table - individual

REMARKS: Each steering column is mounted to its foundation by one of several methods. Check the mounting method visually and compare the mounting method with the method given in the Compiled Reference Table. Insert the correct value. Note: The mounting method may be obscured by trim or other components. Careful investigation (by using mirrors, etc.) should be utilized to uncover the mounting method. It is usual for a manufacturer to use the same mounting method in each vehicle of the same make/model/body style. While variations do exist (Air Cushion Restraints, etc.) this uniformity can be put to advantage in correctly identifying the correct mounting method.

If code 0 is indicated in the Compiled Reference Table, visually inspect the mounting to correctly identify the mounting method. If variable 17 was coded 01, 95 or 99, code 9 (unknown) for this variable.

VARIABLE GROUP: Steering Column: Compression

VARIABLE NAME: 19. Device Original Dimension

FORMAT: 3 columns, numeric, beginning column 33

ELEMENT VALUES: ___ __. ___ (tenths of inches): Code actual value from Table
of Compiled Steering Components

998 Not applicable

999 Unknown

SOURCE: Compiled Reference Table

Reference Table - individual

REMARKS: If the column was coded as an EA type on variable 17, refer to the
Compiled Reference Table to obtain the correct EA dimension value and to note
the reference points for measurement.

If the value recorded for variable 17 was 01, code this variable 998.

If the value recorded for variable 17 was 02, 95, 99, code this variable
999.

VARIABLE GROUP: Steering Column: Compression

VARIABLE NAME: 20. Device Compression Value

FORMAT: 3 columns, numeric, beginning column 36

ELEMENT VALUES: __ __.__(tenths of inches): Code actual measured value

998 Not applicable

999 Unknown

SOURCE: Inspection only

REMARKS: Refer to the individual column type codes for how to measure (see variable 17). Measure and record the value for compression in using the same technique as for the original dimension value.

If the value recorded for variable 17 was 01, code this variable 998.

If the value recorded for variable 17 was 02, 95, 99, code this variable 999.

VARIABLE GROUP: Steering Column: Compression

VARIABLE NAME: 21. Device Compression Value

FORMAT: 2 columns, numeric, beginning column 39

ELEMENT VALUES: ___ __ (inches): Subtract the Question 20 value from the
Question 19 value and record the difference

00 No movement, compression, or collapse

Observed Value Code (cannot be measured):

80 Apparent movement, value undetermined

Estimated Movement:

81 Less than 1 inch

82 Between 1 and 2 inches

84 Between 2 and 4 inches

86 Between 4 and 6 inches

88 Between 6 and 8 inches

90 Greater than 8 inches

Other Codes:

98 Not applicable, not measurable

99 Unknown

SOURCE: Calculation

Inspection

REMARKS: The value for compression for the column EA device can be determined by subtracting the measured dimension from the original dimension. This value (rounded off to whole inches) is the distance the column moved during energy dissipation.

When variable 11 is coded 01, the correct entry here is 98.

When the entry for variable 11 is 02 or 95, the correct response to this variable is either code 99 (unknown) or one of the Observed Value Codes.

While an original dimension may be unknown (and hence a calculation not possible) it may still be possible to observe and quantify the extent of the movement or displacement of the device. Hence the Observed Value Codes.

The Observed Value Codes are to be used whenever direct measurement is impractical or impossible but where the movement can be observed and estimated--either by eye or through the use of some other means or reference.

Code 80 is used to denote that movement exists but it cannot be quantified further.

Codes 81, 82, 84, 86, 88, and 90 describe value steps of estimated movement. The boundaries are not exact because these are indeed estimates. Best judgment should be used in assigning a category.

Code 00 is valid in this scheme, since it may be determined that probably no movement exists--although it cannot be verified by measurement.

The use of the Observed Value Codes is preferable to 99 "unknown" because the codes do convey some information on displacement.

VARIABLE GROUP: Steering Column: Compression

VARIABLE NAME: 22. Shear Module: Type of Movement

FORMAT: 1 column, numeric, beginning column 41

ELEMENT VALUES: 1 No movement
2 Displacement only
3 Displacement and separation
4 Not designed to indicate movement
8 Not applicable or no shear module
9 Unknown movement

SOURCE: Inspection only

REMARKS: This variable and the next (variable 22) together describe the shear module movement. This variable describes the type of movement--whether displacement or displacement and separation--when the vehicle is equipped with a shear module mounting system. Refer to variable 18 to determine the applicability of this variable.

If variable 18 is coded 4-6, code this variable 1-3, or 9.

If variable 18 is coded 1-3, or 7, code this variable 4 or 8.

If variable 18 is coded 0, it may still be possible to determine the direction of movement--by observation.

VARIABLE GROUP: Steering Column: Compression

VARIABLE NAME: 23. Shear Module: Measured Movement

FORMAT: 2 columns, numeric, beginning column 42

ELEMENT VALUES: ___(inches): Code actual measured movement. See coding manual for measurement technique(s).

00 No movement, compression, or collapse

Observed Value Code (cannot be measured):

80 Apparent movement, value undetermined

Estimated Movement:

81 Less than 1 inch

82 Between 1 and 2 inches

84 Between 2 and 4 inches

86 Between 4 and 6 inches

88 Between 6 and 8 inches

90 Greater than 8 inches

Other Codes:

98 Not applicable, not measurable


99 Unknown

SOURCE: Inspection

REMARKS: The value of movement for the shear module is determined by measuring the movement within the device. The original dimension is zero (see diagram). Thus the measured dimension becomes the value (rounded to the nearest inch).

When variable 22 is coded 1-3, a value must be recorded here. Code 1 on variable 22 must be coded 00 on this variable. Code 2 or 3 on variable 22 must have a value recorded here of greater than zero. Codes 4 or 8 on variable 22 are coded as 98 here.

If the shear capsule has separated, hold the column up into its original position and measure the distance the shear module moved.

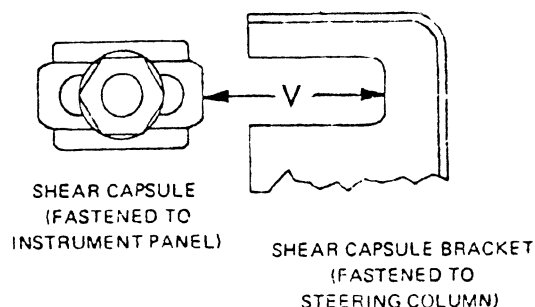

The Observed Value Codes are to be used whenever direct measurement is impractical or impossible but where the movement can be observed and estimated--either by eye or through the use of some other means or reference.

Code 80 is used to denote that movement exists but it cannot be quantified further.

Codes 81, 82, 84, 86, 88, and 90 describe value steps of estimated movement. The boundaries are not exact because they are indeed estimates. Best judgment should be used in assigning a category.

Code 00 is valid in this scheme, since it may be determined that probably no movement exists--although it cannot be verified by measurement.

The use of the Observed Value Codes is preferable to 99 "unknown" because the codes do convey some information on displacement.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 24. AC Original Dimension

FORMAT: 3 columns, numeric, beginning column 44

ELEMENT VALUES: ___ ___ ___(inches): Code actual value form Table of Compiled
Steering Components

995 Undetermined--no reference data: Code "not applicable"
for Question 25. Complete Question 27.

998 Not applicable: Code "not applicable" for Questions
25 and 27.

999 Unknown, not measurable: Code "unknown" for Questions
25 and 27.

SOURCE: Compiled Reference Table

Reference Table - individual

REMARKS: Refer to the Compiled Reference Table to obtain the correct AC
original dimension.


If the values codes 995, the AC original dimension cannot be determined
from observation.

If the column is a telescoping column type (coded 1 on variable 8
"Telescoping Column Feature") the AC measurement cannot be made.

If the column has a tilt column feature (coded 1 on variable 7 "Tilt
Column Feature"), place the column in the middle position before measuring.
If the column cannot be returned to this position, the AC dimension cannot
be properly ascertained.

AC DIMENSION REFERENCE POINT AND MEASUREMENT TECHNIQUE

Measurement to bottom edge of upper backlight trim at glass.

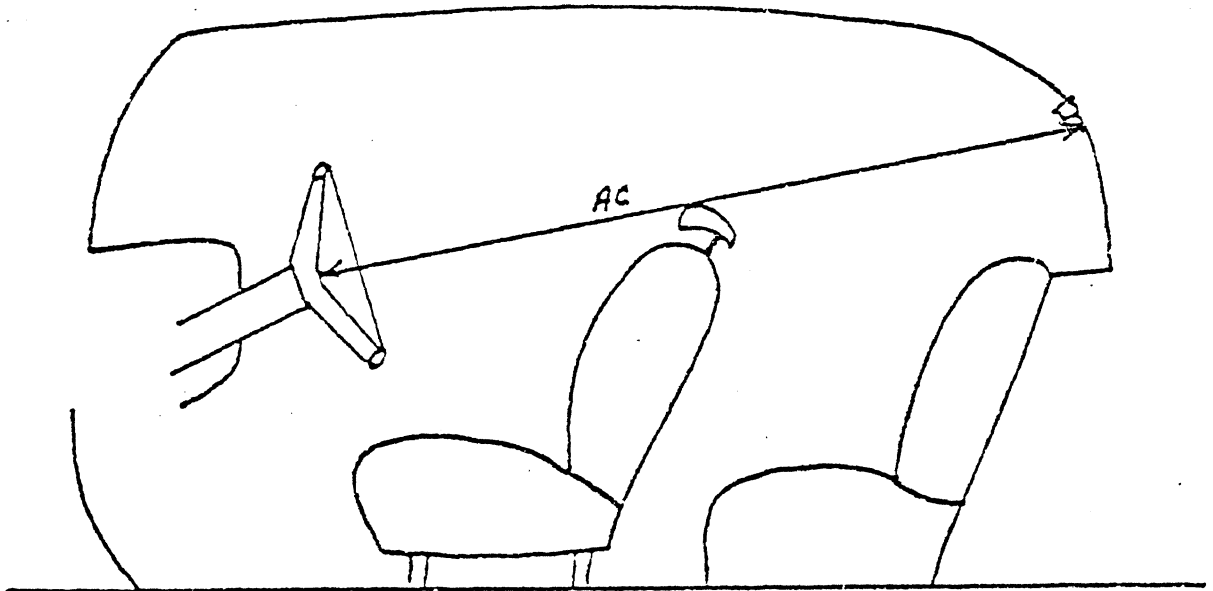

AC Reference Point Codes:

- (1) Backlight glass header

AC Measurement Notes: straight line measurement if possible.

- (1) If adjustable headrest, measurement is with headrest down.
- (2) If high back seat, measurement is over top of seat back.
- (3) Vehicles with no back seat, measurement is still taken to window trim.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 25. AC Measured Dimension

FORMAT: 3 columns, numeric, beginning column 47

ELEMENT VALUES: ___ ____(inches): Code measured value.

998 Not applicable

999 Unknown

SOURCE: Inspection only

REMARKS: Refer to variable 24 for how to measure. Measure and record the value for the AC dimension using the same technique as for the original dimension value.

If the value recorded for variable 24 was 995, or 998, code this variable 998.

If the value recorded for variable 24 was 999, code this variable 999.

Note: If the column has separated from its mounting and is not in the normal axial plane (i.e., column is lying on the seat) and cannot be returned to position for measurement, code 999.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 26. Direction of Axial Movement

FORMAT: 1 column, numeric, beginning column 50

ELEMENT VALUES: 1 No displacement
2 Compression (measured dimension greater than original)
3 Intrusion (measured dimension less than original)
4 Displacement, unknown direction
9 Unknown (NOTE: Includes loose column through mounting separation.)

SOURCE: Inspection

REMARKS: Based on the results of the calculation to obtain a value for variable 27, note whether the value for displacement indicates compression or intrusion.

If there was no displacement (code 00 on variable 27) then the correct response here is 1.

Code 9 denotes either unknown displacement, or displacement which cannot be measured because the column has separated from its mounting and is out of place (lying on the seat).

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 27. AC Axial Movement

FORMAT: 3 columns, numeric, beginning column 51

ELEMENT VALUES: ___ ___ ___(inches): Subtract the Question 25 value from the
Question 24 value and record the difference.

000 No movement, compression, or collapse

Observed Value Code (cannot be measured):

980 Apparent movement, value undetermined

Estimated Movement:

981 Less than 1 inch

982 Between 1 and 2 inches

984 Between 2 and 4 inches

986 Between 4 and 6 inches

988 Between 6 and 8 inches

990 Greater than 8 inches

Other Codes:

998 Not applicable, not measurable

999 Unknown

SOURCE: Calculation

Inspection

REMARKS: The value for the AC dimension axial movement can be determined by subtracting the measured dimension from the original dimension. This value is the distance the column moved during energy dissipation. The value obtained can be positive or negative, depending upon whether the column moved forward or rearward.

When variable 24 is coded 998 or 999, the correct entry here is 999.

When the entry for variable 24 is 995, the correct response to this variable is either code 999 (unknown) or one of the Observed Value Codes.

Code 999 should be used when the column has separated from its mounting and is not in its normal axial plane. An accurate measurement cannot be obtained unless the column can be returned to its original position.

While an original dimension may be unknown (and hence a calculation not possible) it may still be possible to observe and quantify the extent of the movement or displacement of the device. Hence the Observed Value Codes.

The Observed Value Codes are to be used whenever direct measurement is impractical or impossible but where the movement can be observed and estimated--either by eye or through the use of some other means or reference.

Code 80 is used to denote that movement exists but it cannot be quantified further.

Codes 81, 82, 84, 86, 88, and 90 describes value steps of estimated movement. The boundaries are not exact because they are indeed estimates. Best judgment should be used in assigning a category.

Code 00 is valid in this scheme, since it may be determined that probably no movement exists--although it cannot be verified by measurement.

The use of the Observed Value Codes is preferable to 999 "unknown" because the codes do convey some information on movement.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 28. Lateral (\leftrightarrow) Column Displacement: Direction

FORMAT: 1 column, numeric, beginning column 54

ELEMENT VALUES: 1 No displacement
2 Right
3 Left
4 Displacement, unknown direction
9 Unknown (NOTE: Includes loose column through mounting separation.)

SOURCE: Inspection only

REMARKS: The lateral steering column displacement is determined by observing the steering wheel end of the column relative to its end at the firewall (or at some intermediate point) and noting if the column has moved left or right. If the mounting has separated, the lateral displacement cannot be accurately determined, hence code 9.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 29. Lateral (\leftrightarrow) Column Displacement: Magnitude

FORMAT: 1 column, numeric, beginning column 55

ELEMENT VALUES: 1 No apparent displacement
2 Minor, ≤ 2 inches } Eyeball
3 Major, > 2 inches } Guestimate
9 Unknown

SOURCE: Inspection only

REMARKS: The magnitude of the displacement is determined by observing the steering wheel end of the column relative to its end at the firewall (or some intermediate point) and estimating the amount of off-axis movement of the column.

If the mounting has separated, the magnitude of the lateral displacement cannot be accurately determined, hence code 9.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 30. Vertical (↑↓) Column Displacement: Direction

FORMAT: 1 column, numeric, beginning column 56

ELEMENT VALUES: 1 No displacement
2 Up
3 Down
4 Displacement, unknown direction
9 Unknown (NOTE: Includes loose column through mounting separation)

SOURCE: Inspection only

REMARKS: The vertical steering column displacement is determined by observing the steering wheel end of the column relative to its end at the firewall (or at some intermediate point) and noting if the column has moved up or down. If the mounting has separated, the vertical displacement cannot be accurately determined, hence code 9.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 31. Vertical (\updownarrow) Column Displacement: Magnitude

FORMAT: 1 column, numeric, beginning column 57

ELEMENT VALUES: 1 No apparent displacement
 2 Minor, ≤ 2 inches } Eyeball
 3 Major, > 2 inches } Guestimate
 9 Unknown

SOURCE: Inspection only

REMARKS: The magnitude of the displacement is determined by observing the steering wheel end of the column relative to its end at the firewall (or some intermediate point) and estimating the amount of off-axis movement of the column.

If the mounting has separated, the magnitude of the vertical displacement cannot be accurately determined, hence code 9.

VARIABLE GROUP: Column Displacement

VARIABLE NAME: 32. Column Mounting Damage

FORMAT: 1 column, numeric, beginning column 58

ELEMENT VALUES: 1 No damage
2 Upper mounting assembly damaged or distorted* (including bracket)
3 Lower mounting assembly damaged or distorted*
4 Upper and lower mounting assembly damaged or distorted*
5 Bracket mounting assembly damaged or distorted*
6 Other mounting damage: _____
9 Unknown damage

SOURCE: Inspection only

REMARKS: The column mounting devices are those items or hardware attached to the column and used to attach the column to the foundation.

Damage to the column mounting device occurs as a result of twisting, tearing, bending, distorting, etc., to the mounting assembly. This does not include shear capsule separation, unless by other than normal shear capsule movement.

VARIABLE GROUP: Foundation and Surrounding Structure Damage

VARIABLE NAME: 33. Toe Pan Area Damage Near Column

FORMAT: 2 columns, numeric, beginning column 59

ELEMENT VALUES: 01 None

02 Displaced or buckled rearward or into occupant space

03 Displaced or buckled forward or away from occupant space

08 Combination of above (specify):

98 Not applicable

99 Unknown if damaged

SOURCE: Inspection only.

REMARKS: The foundation is the portion of the vehicle (instrument panel, toe pan, etc.) to which the steering column is mounted.

The toe pan area near the column can be displaced forward or rearward, causing the EA device to compress or the column itself to move.

VARIABLE GROUP: Foundation and Surrounding Structure Damage

VARIABLE NAME: 34. Instrument Panel Vertical Rotation Near Column

FORMAT: 2 columns, numeric, beginning column 61

ELEMENT VALUES: 01 None
06 Rotated or displaced upwards
07 Rotated or displaced downwards
08 Combination of the above (specify):

98 Not applicable
99 Unknown if damaged

SOURCE: Inspection only

REMARKS: The foundation is the portion of the vehicle (instrument panel, toe pan, etc.) to which the steering column is mounted.

When variable 22 is coded 1-3, a value must be recorded here. Code 1 on variable 22 must be coded 00 on this variable. Code 2 or 3 must have a value recorded of greater than zero. Codes 4 or 8 on variable 22 are coded 98 here.

If the shear capsule has separated, hold the column up into its original position and measure the distance the module moved.

The steering column can be forced upwards due to a rotation of the front of the instrument panel. This can also cause the shear capsules to separate.

VARIABLE GROUP: Foundation and Surrounding Structure Damage

VARIABLE NAME: 35. Instrument Panel Buckle Near Column

FORMAT: 2 columns, numeric, beginning column 63

ELEMENT VALUES: 01 None

02 Displaced or buckled rearward or into occupant space

03 Displaced or buckled forward or away from occupant space

04 Displaced left

05 Displaced right

08 Combination of above (specify):

98 Not applicable

99 Unknown if damaged

SOURCE: Inspection only

REMARKS: The foundation is the portion of the vehicle (instrument panel, toe pan, etc.) to which the steering column is mounted.

Buckling of the instrument panel is caused by laterally applied side forces. This can cause the column to move sideways or up or down due to movement, compression, or buckling of the instrument panel.

VARIABLE GROUP: Foundation and Surrounding Structure Damage

VARIABLE NAME: 36. Bracket Mount Surface or Device Damaged

FORMAT: 2 column, numeric, beginning column 65

ELEMENT VALUES: 01 None
02 Displaced or buckled rearward or into occupant space
03 Displaced or buckled forward or away from occupant space
04 Displaced left
05 Displaced right
06 Rotated or displaced upwards
07 Rotated or displaced downwards
08 Combination of above (specify):

98 Not applicable
99 Unknown if damaged

SOURCE: Inspection only

REMARKS: The foundation is the portion of the vehicle (instrument panel, toe pan, etc.) to which the steering column is mounted.

In some cases, a bracket may be used as a column mounting. This bracket may be attached to some structure other than the toe pan or instrument panel, i.e., the brake pedal mount. If a bracket mount is used, indicate which type of damage occurred to the mounting surface.

If a bracket mount is not used, code 98.

STEERING COLUMN FORM

1. Primary Sampling Unit Number 1 2

2. Case Number 3 4 5 6

3. Special Study Number 7 8

4. Record Number 9

5. Vehicle Number 10 11

STEERING SYSTEM OPTIONAL EQUIPMENT

6. Speed Control
 (NOTE: Factory installed--not a dealer installed unit.)
 (1) Equipped
 (2) Not equipped
 (9) Unknown 12

7. Tilt Column Feature
 (1) Equipped
 (2) Not equipped
 (9) Unknown 13

8. Telescoping Column Feature
 (1) Equipped
 (2) Not equipped
 (9) Unknown 14

STEERING WHEEL: DEVICE

9. Wheel Configuration (Number of Spokes and Arrangement)
 _____ -- Code actual value from those listed in the Table of Compiled Steering Components or from the reverse side.
 (95) Undetermined--no reference data
 (97) Other: Sketch configuration in the space provided on the reverse side
 (99) Unknown spokes and arrangement 15 16

10. Wheel Profile
 (1) Deep dish
 (2) Shallow dish
 (3) Flat
 (4) Other profile:

 (5) Undetermined--no reference data
 (9) Unknown profile 17

STEERING COLUMN PERFORMANCE ASSESSMENT

When To Use This Form: Complete this form whenever this vehicle was a towaway and the initial crash event involved a frontal or side collision [i.e., exclude initial rear impacts (clock directions 04-08) and exclude rollovers].

Photographic Instructions: Take at least two photographs of the steering column wheel, Energy Absorbing (EA) Device, etc., so as to best depict the location and magnitude of the damage. Photograph the mounting and foundation also, if damaged.

Steering System Defined: That portion of the steering assembly which is located within the passenger compartment consisting of the following components/subsystems.

1. The column, extending from the toe pan to its termination in the steering wheel hub
2. Associated mounting brackets, hardware, and foundation
3. Associated energy absorbing devices
4. The steering wheel

11. Wheel Energy Absorbing [EA] Type Code
 (NOTE: While most wheels are designed to absorb some energy, certain wheels are specifically EA and replace the column EA capability.)
 (01) Non-EA wheel -- Code "not applicable" for Questions 12-14.
 (02) EA wheel type unspecified -- Code actual value. (See Table of Compiled Steering Components for code applicable to your specific make, model, and model year.)
 (90) Other:

 (95) Undetermined--no reference data -- Code "unknown" for Questions 12 and 13. Complete Question 14.
 (99) Unknown if EA wheel -- Code "unknown" for Questions 12-14. 18 19

STEERING WHEEL: DAMAGE

Wheel EA Compression Calculation

12. Wheel Original Dimension
 _____ tenths of inches -- Code actual value from Table of Compiled Steering Components.
 (998) Not applicable
 (999) Unknown 20 21 22

13. Wheel Compressed Dimension
 (NOTE: See reference manual for how-to-measure. Example on reverse side.)
 _____ tenths of inches -- Code actual measured value.
 (998) Not applicable
 (999) Unknown 23 24 25

WHEEL CONFIGURATIONS


1 spoke

11 =




2 spokes

21 =




3 spokes

31 =




4 spokes


41 =




22 =




32 =




42 =




23 =



43 =




97 =
Other



ENERGY ABSORBING STEERING WHEEL MEASUREMENT

Example Only:
See reference manual
for different
techniques.

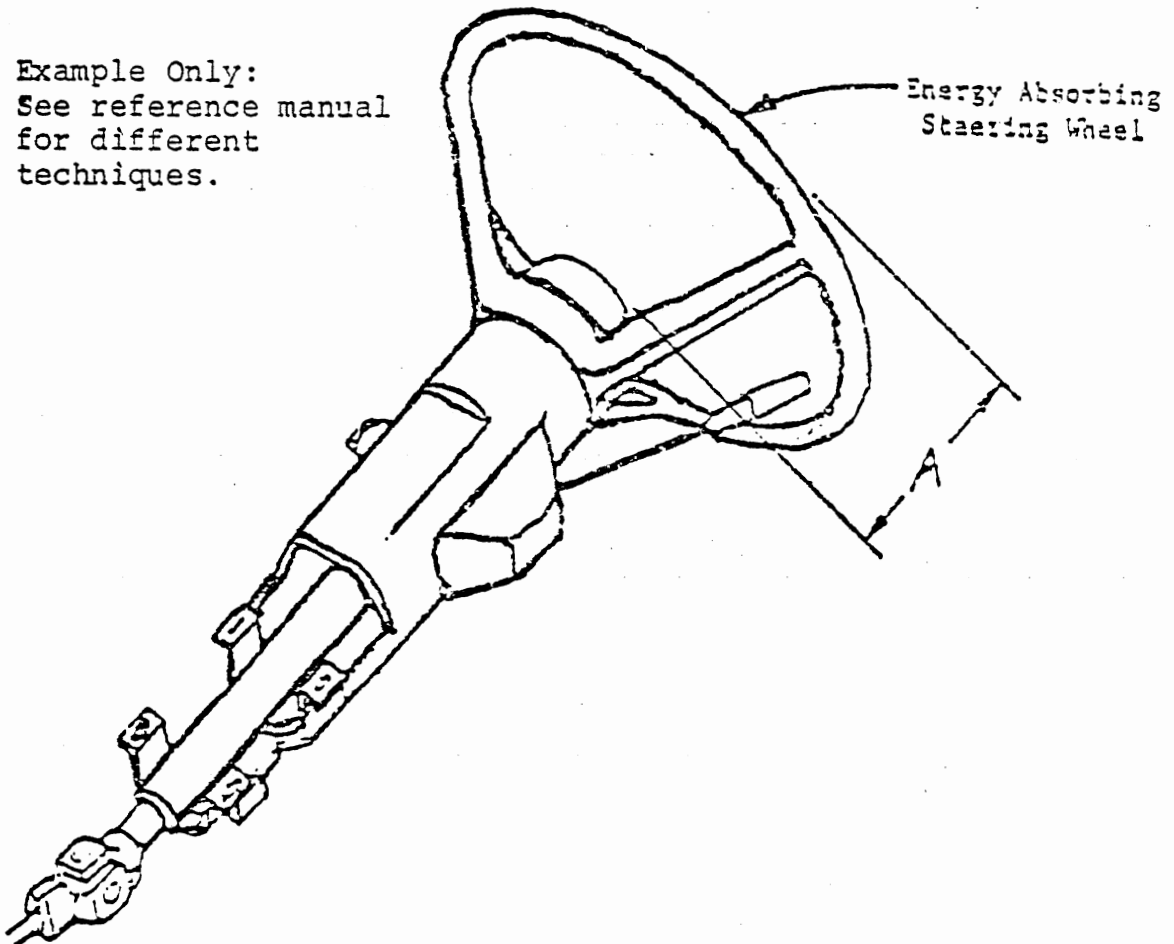

14. Wheel Compression Value

(NOTE: Result is rounded to the nearest inch.)

_____ inches -- Subtract the Question 13 value from the Question 12 value and record the difference.

___(00) No movement, compression, or collapse

Observed Value Code (cannot be measured):

___(80) Apparent movement, value undetermined

Estimated movement:

- ___(81) less than 1 inch
- ___(82) between 1 and 2 inches
- ___(84) between 2 and 4 inches
- ___(86) between 4 and 6 inches
- ___(88) between 6 and 8 inches
- ___(90) greater than 8 inches

Other Codes:

- ___(98) Not applicable, not measurable
- ___(99) Unknown

26 27

15. Rim Distortion

- ___(1) No distortion
- ___(2) Minor bending--less than 1 inch
- ___(3) Severe bending--greater than 1 inch
- ___(4) Broken (i.e., separated)
- ___(9) Unknown distortion

28

16. Spoke Distortion

- ___(1) No distortion
- ___(2) Minor bending--less than 1 inch
- ___(3) Severe bending--greater than 1 inch
- ___(4) Broken (i.e., separated)
- ___(9) Unknown distortion

29

STEERING COLUMN: DEVICE

17. Energy Absorbing Device Type

- ___(01) Non-EA column -- Code "not applicable for Questions 19-21.
- ___(02) EA column type unspecified -- Code actual value. (See Table of Compiled Steering Components for code applicable to your specific make, model, and model year. Also, see those listed on reverse side.)
- ___(90) Other [sketch on reverse side]:

- ___(93) Undetermined--no reference data -- Code "unknown" for Questions 19 and 20. Complete Question 21.
- ___(99) Unknown if EA column -- Code "unknown" for Questions 19-21.

30 31

18. Mounting Method

___(0) Undetermined--no reference data Rigid to Instrument Panel:

- ___(1) Rigid at toe pan/lower firewall
- ___(2) Lower bracket
- ___(3) No lower attachment

Shear Module at Instrument Panel:

- ___(4) Rigid at toe pan/lower firewall
- ___(5) Lower bracket
- ___(6) No lower attachment

- ___(7) Bracket
- ___(8) Other:

___(9) Unknown method

32

STEERING COLUMN: COMPRESSION

Column EA Device Compression Calculation

19. Device Original Dimension

_____ tenths of inches -- Code actual value from Table of Compiled Steering Components.

- ___(998) Not applicable
- ___(999) Unknown

33 34 35

20. Device Compressed Dimension

_____ tenths of inches -- Code actual measured value.

- ___(998) Not applicable
- ___(999) Unknown

36 37 38

21. Device Compression Value

(NOTE: Result is rounded to the nearest inch.)

_____ inches -- Subtract the Question 20 value from the Question 19 value and record the difference.

___(00) No movement, compression, or collapse

Observed Value Code (cannot be measured):

- ___(80) Apparent movement, value undetermined
- Estimated movement:
- ___(81) less than 1 inch
- ___(82) between 1 and 2 inches
- ___(84) between 2 and 4 inches
- ___(86) between 4 and 6 inches
- ___(88) between 6 and 8 inches
- ___(90) greater than 8 inches

Other Codes:

- ___(98) Not applicable, not measurable
- ___(99) Unknown


39 40

22. Shear Module: Type of Movement

- ___(1) No movement
- ___(2) Displacement only
- ___(3) Displacement and separation
- ___(4) Not designed to indicate movement
- ___(8) Not applicable or no shear module
- ___(9) Unknown movement

41


STEERING COLUMN ENERGY ABSORBING DEVICES

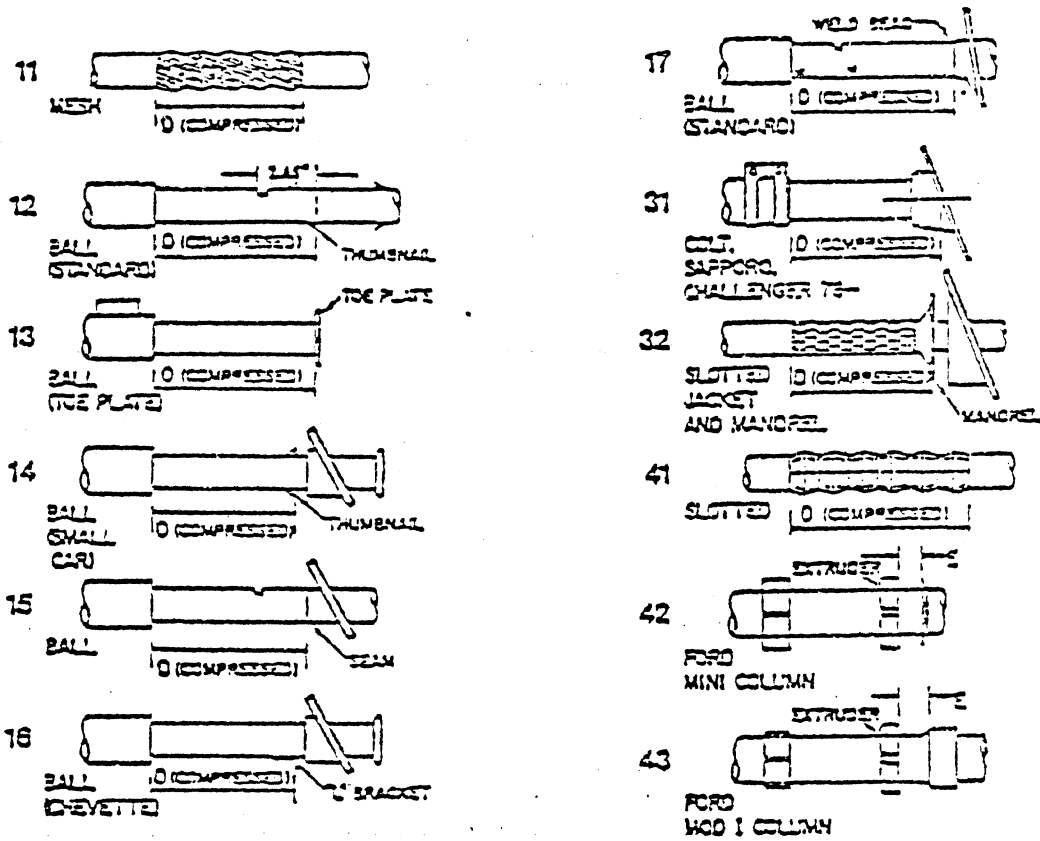

FRONT OF VEHICLE

AC DIMENSION REFERENCE POINT AND MEASUREMENT TECHNIQUE

Measurement to bottom edge of upper backlight trim at glass.

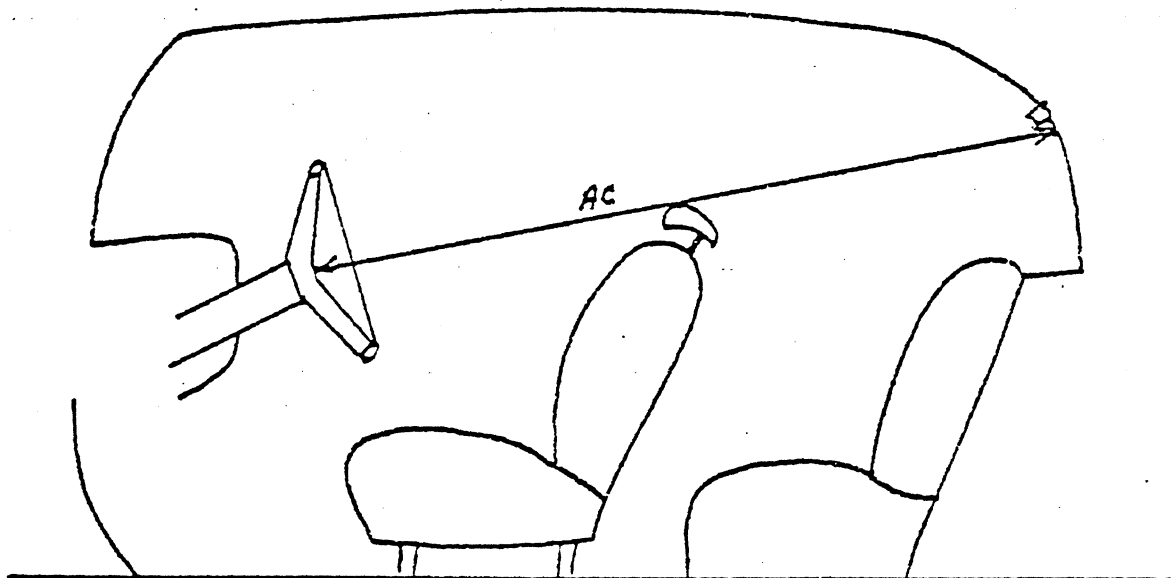

AC Reference Point Codes:

- (1) Backlight glass header

AC Measurement Notes: straight line measurement if possible.

- (1) If adjustable headrest, measurement is with headrest down.
- (2) If high back seat, measurement is over top of seat back.
- (3) Vehicles with no back seat, measurement is still taken to window trim.

23. Shear Module: Measured Movement
(NOTE: Result is rounded to the nearest inch.)

_____ inches -- Code actual measured movement. See coding manual for measurement technique(s).

___ (00) No movement, compression, or collapse

Observed Value Code (cannot be measured):

___ (80) Apparent movement, value undetermined

Estimated movement:

- ___ (81) less than 1 inch
- ___ (82) between 1 and 2 inches
- ___ (84) between 2 and 4 inches
- ___ (86) between 4 and 6 inches
- ___ (88) between 6 and 8 inches
- ___ (90) greater than 8 inches

Other Codes:

- ___ (98) Not applicable, not measurable
- ___ (99) Unknown

42 43

COLUMN DISPLACEMENT

AC Dimension Axial Movement Calculation

24. AC Original Dimension

_____ inches -- Code actual value from Table of Compiled Steering Components.

___ (995) Undetermined--no reference data -- Code "not applicable" for Question 25. Complete Question 27.

___ (998) Not applicable--reference data available -- Code "not applicable" for Questions 25 and 27.

___ (999) Unknown, not measurable -- Code "unknown" for Questions 25 and 27.

44 45 46

25. AC Measured Dimension

(NOTE: See diagram and related notes on reverse side of preceding page.)

_____ inches -- Code actual measured value.

- ___ (998) Not applicable
- ___ (999) Unknown

47 48 49

26. Direction of Axial Movement

- ___ (1) No displacement
- ___ (2) Compression (measured dimension greater than original)
- ___ (3) Intrusion (measured dimension less than original)
- ___ (4) Displacement, unknown direction
- ___ (9) Unknown (NOTE: Includes loose column through mounting separation.)

50

27. AC Axial Movement

(NOTE: Result is rounded to the nearest inch.)

_____ inches -- Subtract the Question 25 value from the Question 24 value and record the difference.

___ (000) No movement, compression, or collapse

Observed Value Code (cannot be measured):

___ (980) Apparent movement, value undetermined

Estimated movement:

- ___ (981) less than 1 inch
- ___ (982) between 1 and 2 inches
- ___ (984) between 2 and 4 inches
- ___ (986) between 4 and 6 inches
- ___ (988) between 6 and 8 inches
- ___ (990) greater than 8 inches

Other Codes:

- ___ (998) Not applicable, not measurable
- ___ (999) Unknown

51 52 53

28. Lateral (↔) Column Displacement: Direction

(NOTE: Determined at the steering wheel end.)

- ___ (1) No displacement
- ___ (2) Right
- ___ (3) Left
- ___ (4) Displacement, unknown direction
- ___ (9) Unknown (NOTE: Includes loose column through mounting separation.)

54

29. Lateral (↔) Column Displacement: Magnitude

(NOTE: See previous note.)

- ___ (1) No apparent displacement
- ___ (2) Minor, < 2 inches } Eyeball
- ___ (3) Major, > 2 inches } Guestimate
- ___ (9) Unknown

55

30. Vertical (↑) Column Displacement: Direction

(NOTE: See note on Question 28.)

- ___ (1) No displacement
- ___ (2) Up
- ___ (3) Down
- ___ (4) Displacement, unknown direction
- ___ (9) Unknown (NOTE: Includes loose column through mounting separation.)

56

31. Vertical (↑) Column Displacement: Magnitude

(NOTE: See note on Question 28.)

- ___ (1) No apparent displacement
- ___ (2) Minor, < 2 inches } Eyeball
- ___ (3) Major, > 2 inches } Guestimate
- ___ (9) Unknown

57

32. Column Mounting Damage
 (NOTE: Does not include shear capsule separation, unless by other than normal shear capsule movement.)

- (1) No damage
- (2) Upper mounting assembly damaged or distorted* (including bracket)
- (3) Lower mounting assembly damaged or distorted*
- (4) Upper and lower mounting assembly damaged or distorted*
- (5) Bracket mounting assembly damaged or distorted*
- (6) Other mounting damage:
- (9) Unknown damage

58

* Damage results from twisting, tearing, bending, distorting, etc. to the mounting assembly.

FOUNDATION AND SURROUNDING STRUCTURE DAMAGE

33. Toe Pan Area Damage Near Column

- (01) None
- (02) Displaced or buckled rearward or into occupant space
- (03) Displaced or buckled forward or away from occupant space
- (08) Combination of above [specify]:
- (98) Not applicable
- (99) Unknown if damaged

59 60

34. Instrument Panel Vertical Rotation Near Column

- (01) None
- (06) Rotated or displaced upwards
- (07) Rotated or displaced downwards
- (03) Combination of above [specify]:
- (98) Not applicable
- (99) Unknown if damaged

61 62

35. Instrument Panel Buckle Near Column

- (01) None
- (02) Displaced or buckled rearward or into occupant space
- (03) Displaced or buckled forward or away from occupant space
- (04) Displaced left
- (05) Displaced right
- (08) Combination of above [specify]:
- (98) Not applicable
- (99) Unknown if damaged

63 64

36. Bracket Mount Surface or Device Damaged

(NOTE: If bracket mount used.)

- (01) None
- (02) Displaced or buckled rearward or into occupant space
- (03) Displaced or buckled forward or away from occupant space
- (04) Displaced left
- (05) Displaced right
- (06) Rotated or displaced upwards
- (07) Rotated or displaced downwards
- (08) Combination of above [specify]:
- (98) Not applicable
- (99) Unknown if damaged

65 66