

ANALYSIS AND DESIGN OF TRUSSED STRUCTURES MADE OF ELASTIC/ STIFFENING MATERIALS

J.E. Taylor* and P.D. Washabaugh⁺

University of Michigan, Ann Arbor Michigan 48109-2118
September 9, 1994

Abstract

An extremum problem formulation for the equilibrium analysis of general structures made of stiffening material is applied to the analysis of trussed structures. The nonlinear material is modeled in a way to simulate an arbitrary, polygonal stress-strain relation; material properties may vary over the truss. The form of this convex nonlinear programming problem statement is convenient for the prediction of the evolution (over the truss system) of local member stiffening under increasing proportional load. Computational solutions are obtained directly on the basis of the extremum problem statement, using commercial minimizer software. The formulation for analysis is extended to model a design problem for the prediction of the optimal modification of certain material properties, namely the bounds that reflect the onset of stiffening in the material. Computational results for this optimal material design problem are also provided.

1.0 Introduction

The goal of this paper is to demonstrate the utility of a recently developed extremum principle¹ in the context of the analysis and design of structures that include nonlinear-stiffening materials. In brief, the formulation treats total strain in the nonlinear problem as a superposition of an arbitrary number of independent constituent fields. The problem is expressed in 'mixed form', and it has the structure of a convex, constrained, nonlinear extremum problem statement. This additive decomposition of a nonlinear material response is distinct and offers certain advantages over typical formulations (e.g. 2,3,4). The model is general for materials of stiffening type; i.e. with the proper identification of a set of parameters, it is possible to simulate any stiffening

material. Also, the parameters that are used to define the material properties, (here the moduli of each constituent field and bounds on the constituent response) appear explicitly in the problem formulation, and this facilitates an extension of the formulation to treat certain aspects of design of material properties.

The first aspect of the paper specializes the general principle for its application to the analysis of truss structures made of stiffening materials. The problem formulation is stated and interpreted for general trussed structures. Using a commercially available optimizer package, numerical solutions of two nonlinear trusses are provided as examples of the feasibility and utility of this approach. In the second phase of this study, a convex extremum problem statement is presented for the optimal design of material parameters related to the onset of stiffening. This second problem allows the nonlinear aspects of the structural response to be fashioned within a resource constraint. A numerical example of this material design problem is also provided.

2.0 A Minimum Principle For Equilibrium Analysis

The minimum principle described by Taylor¹ for general continuum structures is specialized here for arbitrary two or three dimensional trusses. Our approach is to first describe the structure of the model for the nonlinear stiffening material itself, and then to present the extremum problem statement covering global equilibrium analysis for the truss made of such material. Computational results showing the evolution of hardening over the truss system under increasing load are presented in this section as well.

2.1 Model Description

Total strain ϵ_{Ti} of the nonlinear stiffening material is represented (for the i th truss member) in terms of independent measures σ_i and ϵ_i^β ($\beta = 1, 2, \dots, N_i$) as

*. Professor, Department of Aerospace Engineering, University of Michigan, Ann Arbor, Michigan.

+ . Assistant Professor, Department of Aerospace Engineering, University of Michigan, Ann Arbor, Michigan.


$$\epsilon_{Ti} = \frac{\sigma_i}{E_i} + \sum_{\beta=1}^{N_i} \epsilon_i^\beta \quad (\text{EQ 1})$$

This superposition corresponds in form to the representation of kinematics for a system in which mechanical elements, each associated with the separate measures in (1), are connected in series. E_i represents a specified constant which can be interpreted as the modulus of the σ_i constituent. Suppose now that the quantities ϵ_i^β , which are referred to as *constituent strains*, have the following form:

$$\epsilon_i^\beta = \begin{cases} \sigma_i/E_i^\beta & \text{when } (-\bar{\epsilon}_i^\beta < \epsilon_i^\beta < \bar{\epsilon}_i^\beta), \text{ else} \\ \bar{\epsilon}_i^\beta & \text{when } (\sigma_i \geq E_i^\beta \bar{\epsilon}_i^\beta) \\ -\bar{\epsilon}_i^\beta & \text{when } (\sigma_i \leq -E_i^\beta \bar{\epsilon}_i^\beta) \end{cases} \quad (\text{EQ 2})$$

Here values E_i^β , $\bar{\epsilon}_i^\beta$, and $\bar{\epsilon}_i^\beta$ are specified and can be interpreted as the modulus, lower bound, and upper bound of the ϵ_i^β constituent, respectively. This stress-strain relation describes what has been labelled an elastic/locking material (see Figure 1); the model was first presented by Pagar⁵. With this definition of constituent strains ϵ_i^β , the total strain of expression (1) has the form shown in Figure 2. Given that the values specified for parameters E_i , E_i^β , $\bar{\epsilon}_i^\beta$, $\bar{\epsilon}_i^\beta$, and N_i , are arbitrary, the polygonal form defined by (1) and (2) is regarded to be the *general representation* of constitutive properties for the stiffening material considered in this paper (we do not address here the identification problem, essentially one of curve-fitting, of matching the present model to data for a specific material).


FIGURE 1. Plot of the locking and enduring constituent stress strain behavior of a truss member.

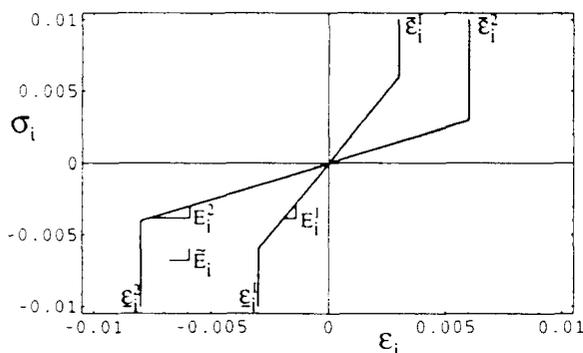

The formulation for global equilibrium analysis is described next. It is distinguished from certain known mixed models for the analysis problem (see e.g. Washizu⁶, Oden and Reddy⁷, Arthurs⁸, and Sewell⁹) by the features that it has the form of an *extremum problem*, and it provides in its structure for specification of material properties (for the

general polygonal material) in terms of a set of parameters. We note also that in the present formulation the model for our nonlinear material is incorporated quite simply (in implicit form) within the variational problem statement, and consequently it becomes unnecessary ever to deal directly with the mathematically cumbersome forms of (1) and (2).

FIGURE 2. Plot of the total stress strain behavior of a truss member.

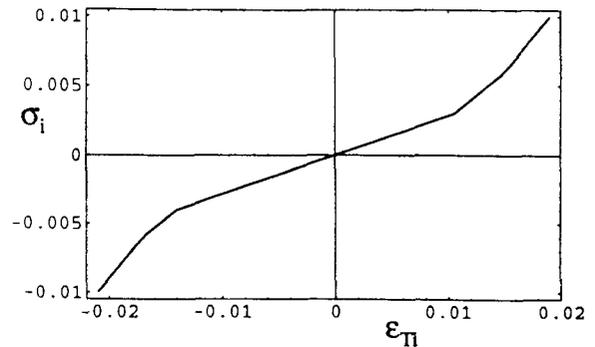

The variational problem statement described here can be identified as a generalization of the classical minimum potential energy formulation for equilibrium analysis of systems with linear materials (indeed, the conventional form is recovered as a special case within our formulation)¹. Expressed in words the problem is stated: 'Minimize a load factor within constraints that bound the value of a generalized potential energy, that reflect limits on the magnitude of the strain constituents introduced in (1) above, and that enforce strain-displacement relations'. In the context of the variational problem, the load factor α , stresses σ_i , strain constituents ϵ_i^β , and nodal displacements u_γ are independent. The problem formulation may be expressed in the following form:

$$\begin{cases} \min \alpha \\ \alpha, \sigma, \epsilon, u \\ \text{subject to:} \\ \frac{1}{2} \sum_{i=1}^M A_i l_i \left[\frac{\sigma_i^2}{E_i} + \sum_{\beta=1}^{N_i} E_i^\beta (\epsilon_i^\beta)^2 \right] - \\ \alpha \sum_{\gamma=1}^N p_\gamma u_\gamma + \Pi \leq 0 \quad (\text{C1}) \\ A_i l_i (\epsilon_i^\beta - \bar{\epsilon}_i^\beta) \leq 0 \\ A_i l_i (-\epsilon_i^\beta - \bar{\epsilon}_i^\beta) \leq 0 \quad \forall i; \forall \beta \quad (\text{C2}) \\ A_i \left\{ \sum_{\gamma=1}^N D_{i\gamma} u_\gamma - \left(\frac{\sigma_i}{E_i} + \sum_{\beta=1}^{N_i} \epsilon_i^\beta \right) l_i \right\} = 0 \\ \forall i \quad (\text{C3}) \end{cases} \quad [\text{P}]$$

Additional symbols appearing here are A_i and l_i for member area and length, p_γ and u_γ for system loads and displacement fields, $D_{i\gamma}$ for the compatibility matrix. M represents the number of truss members in the system and, N identifies the number of independent nodal displacements u_γ , and N_i is the count of independent constituents in the i th member.

Formulation [P] describes a convex, constrained nonlinear programming problem. Thus the 'necessary conditions' for the problem suffice to determine a unique solution, and it may be verified that the equilibrium state of the truss is given by this solution. Toward a verification of this, the Kurash-Kuhn-Tucker conditions for the problem are to be interpreted. With multipliers Λ , μ_i^β , ν_i^β , and κ_i associated with constraints (C1 - 3) respectively, stationarity with respect to load parameter α , and fields σ_i , ϵ_i^β , and u_γ are (in order, and after simplification):

$$1 - \Lambda \left(\sum_{\gamma=1}^N p_\gamma u_\gamma \right) = 0 \quad (\text{EQ 3})$$

$$\kappa_k = \Lambda \sigma_k \quad \forall k \quad (\text{EQ 4})$$

$$\Lambda E_k^\beta \epsilon_k^\beta + \mu_k^\beta - \nu_k^\beta - \kappa_k = 0 \quad \forall k; \forall \beta \quad (\text{EQ 5})$$

$$-\Lambda \alpha p_\delta + \sum_{i=1}^M A_i \kappa_i D_{i\delta} = 0 \quad \forall \delta \quad (\text{EQ 6})$$

Equation (3) simply provides for the evaluation of Λ . Substitution of $\kappa_i = \Lambda \sigma_i$ from (4) into (6) produces a statement of the system equilibrium equations in terms of stresses σ_i , i.e.,

$$\sum_{i=1}^M A_i \sigma_i D_{i\delta} - \alpha p_\delta = 0 \quad \forall \delta \quad (\text{EQ 7})$$

With the elimination of κ_i from equations (5), the constituent strains are expressed as:

$$\epsilon_i^\beta = [\sigma_i - (\mu_i^\beta - \nu_i^\beta)] / E_i^\beta \quad (\text{EQ 8})$$

For convenience $\tilde{\mu}_i^\beta = \mu_i^\beta / \Lambda$ and $\tilde{\nu}_i^\beta = \nu_i^\beta / \Lambda$ are introduced. The solution to problem [P] is required to satisfy the following additional necessary (KKT) conditions:

$$\Lambda \left\{ \begin{array}{l} \frac{1}{2} \sum_{i=1}^M A_i l_i \left[\frac{\sigma_i^2}{E_i} + \sum_{\beta} E_i^\beta (\epsilon_i^\beta)^2 \right] - \\ \alpha \sum_{\gamma=1}^N p_\gamma u_\gamma + \Pi \end{array} \right\} \leq 0 \quad (\text{EQ 9})$$

$$\Lambda \geq 0$$

$$\begin{aligned} A_i l_i \tilde{\mu}_i^\beta (\epsilon_i^\beta - \bar{\epsilon}_i^\beta) &= 0 & \tilde{\mu}_i^\beta &\geq 0 \\ A_i l_i \tilde{\nu}_i^\beta (-\epsilon_i^\beta - \underline{\epsilon}_i^\beta) &= 0 & \tilde{\nu}_i^\beta &\geq 0 \end{aligned} \quad \forall i; \forall \beta \quad (\text{EQ 10})$$

$$\kappa_i A_i \left\{ \sum_{\gamma=1}^N D_{i\gamma} u_\gamma - \left(\frac{\sigma_i}{E_i} + \sum_{\beta=1}^{N_i} \epsilon_i^\beta \right) l_i \right\} = 0 \quad \forall i \quad (\text{EQ 11})$$

To complete the interpretation of this system, note from (4) and (11) that $\sigma_i \neq 0$ implies satisfaction for the respective truss member of the strain-displacement constraint (C3). This this property together with (7) assures that fields σ_i and ϵ_i^β in combination satisfy the system equilibrium and compatibility relations. We note that these results apply independent of the degree of material stiffening associated with the particular solution. This latter condition is interpreted uniquely for each constituent field ϵ_i^β as follows. If $0 \leq \epsilon_i^\beta < \bar{\epsilon}_i^\beta$ or $0 \leq -\epsilon_i^\beta < \underline{\epsilon}_i^\beta$, from (10) $\tilde{\mu}_i^\beta = 0$ and $\tilde{\nu}_i^\beta = 0$, whereby (5) provides (for the β th constituent):

$$\epsilon_i^\beta = \frac{\sigma_i}{E_i^\beta} \quad (\text{EQ 12})$$

In other words, the constituents for which this relation holds follow their respective linear stress-strain behavior. Otherwise, for $\tilde{\mu}_i^\beta > 0$ or $(\tilde{\nu}_i^\beta > 0)$, from (10) $\epsilon_i^\beta - \bar{\epsilon}_i^\beta = 0$ (or $-\epsilon_i^\beta - \underline{\epsilon}_i^\beta = 0$), i.e. the constituent is in the locked state. Accordingly, multipliers $\tilde{\mu}_i^\beta$ and $\tilde{\nu}_i^\beta$ may be evaluated from (5) as:

$$\tilde{\mu}_i^\beta = \sigma_i - E_i^\beta \epsilon_i^\beta \quad \forall k; \forall \beta \quad (\text{EQ 13})$$

$$\tilde{\nu}_i^\beta = -\sigma_i - E_i^\beta \epsilon_i^\beta \quad \forall k; \forall \beta \quad (\text{EQ 14})$$

One or the other of these conditions necessarily applies to every constituent, i.e. for each value of β and over all truss elements. It may be verified from the necessary conditions that for every element i , each constituent β within the set $N_i = \{\beta | (\beta = 1, 2, \dots, N_i)\}$ belongs either to $\bar{N}_i = \{\beta \in N_i | (\epsilon_i^\beta < \bar{\epsilon}_i^\beta) \text{ and } (-\epsilon_i^\beta < \underline{\epsilon}_i^\beta)\}$, $\underline{N}_i = \{\beta \in N_i | (\epsilon_i^\beta = \bar{\epsilon}_i^\beta)\}$, or $\bar{N}_i = \{\beta \in N_i | (-\epsilon_i^\beta = \underline{\epsilon}_i^\beta)\}$, and $N_i = N_i \cup \bar{N}_i \cup \underline{N}_i$. In this way it is clear that the constituent fields ϵ_i^β are fully determined via the necessary conditions listed, and this together with the already indicated solution σ_i provides that the unique solution to the global equilibrium analysis problem [P] is complete.

In summary, the means has been described by which the equilibrium analysis problem for arbitrary trusses, having members whose constitutive properties correspond to a parameter-specified polygonal form of stiffening material, is

represented in the form of the convex problem [P]. It may be of interest to note that this model is *dual in concept* to a formulation presented earlier by Taylor¹⁰ for softening materials.

2.2 Computational Examples

The following examples demonstrate the feasibility and utility of using the model [P] for equilibrium analysis to predict computationally the evolution of response of truss structures composed of nonlinear materials. The model was implemented using a commercially available constrained optimizer program incorporated in MATLAB¹¹, running on a Hewlett-Packard computer¹². This program is based on a sequential quadratic programming algorithm¹³. The model was interpreted directly into the program, with no special provisions made to improve efficiency of the solution procedure. For instance, the gradients were calculated numerically rather than provided in analytic form. For all the models discussed here, each solution required on the order of 10^3 seconds on the computer.

The numerical implementation was checked by comparing simple one and two dimensional trusses with a typical analysis pieced together manually. However a special feature of this model is that equilibrium is not explicitly specified, i.e., equilibrium is a consequence of the minimization. Thus verification that the end result truly satisfies equilibrium provides a check on the numerical implementation of the minimization.

2.2.1 Pentagonal Truss

The first model demonstrates the application of this method of analysis to a typical truss geometry. This geometry consists of five nodes and nine bar elements as shown in Figure 3. The truss is loaded at node number 1 by a load inclined at an angle of $\pi/5$ from horizontal. Nodes number 4 and 5 are constrained not to move. Each truss member has the same material and sectional properties. The material consists of a strictly linear constituent and two symmetric stiffening constituents. That is, $\bar{E}_i = 128$, $E_i^1 = 256$, $E_i^2 = 64$, $\bar{\epsilon}_i^1 = \epsilon_i^1 = 0.003$, $\bar{\epsilon}_i^2 = \epsilon_i^2 = 0.006$, and $A_i = 0.1$ for $\{i \in 1, 2, \dots, 9\}$.

The analysis for given values of energy bound (Π), and load and material data proceeds by iteration within the program on the load factor (α), displacement (u_i), and constituent (σ_i), (ϵ_i^β) variables until the load factor is sufficiently converged toward a minimum. The loads at each specified energy resulting from this minimization are shown in Figure 4. The energy parameter is approximately quadratically related to the load factor. The energy load relationship is not truly quadratic because of the nonlinear

constitutive response; it is in fact piecewise quadratic in each region where the active constraints are the same. (This piecewise behavior is not evident on the scale of this figure.)

The displacement of the unconstrained nodes (1, 2, and 3) as a function of the load are given in Figure 5. Here the nonlinear behavior inherent in the model is clearly evident. At small loads each truss element has an effective modulus, E_i , given by equation (15) which is indicative of the series construction of the constituents.

$$\frac{1}{E_i} = \frac{1}{\bar{E}_i} + \sum_{\beta=1}^2 \frac{1}{E_i^\beta} \quad (\text{EQ 15})$$

FIGURE 3. Pentagonal Truss Geometry and Load Vector.


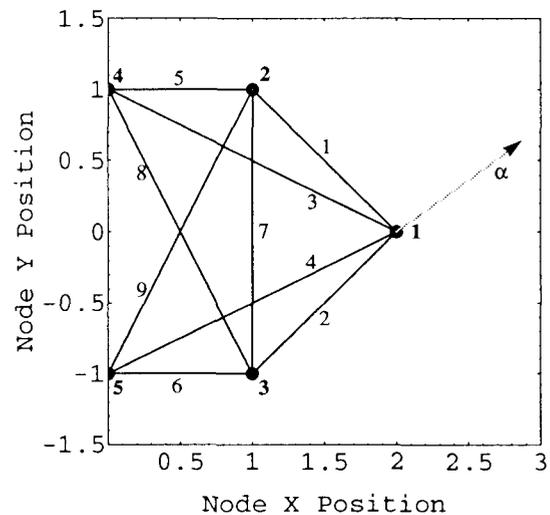



FIGURE 4. Load vs. Specified Energy.

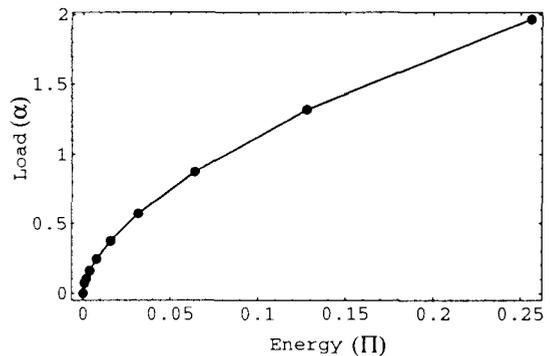

As the allowable energy Π is increased, and with the remaining data held fixed, certain constituents reach their constraint values. A constituent that has an active constraint is 'locked' in the sense that the constituent can no


longer deform. In effect the modulus of the constituent becomes infinite and its inverse becomes zero in equation (15), thereby increasing the effective modulus of the element. When all the constituents for an element become locked, the tangential modulus of the subsequent response becomes the modulus of the linear constituent, i.e., $E_i = \bar{E}_i$.

FIGURE 5. Load vs. Displacement

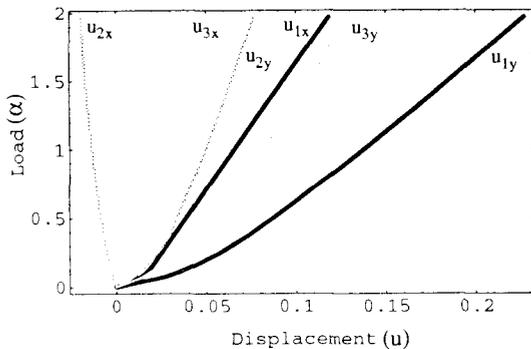

The stress distribution amongst the truss elements, with the specified energy as a parameter, is displayed in Figure 6. At this scale, the effect of the nonlinear behavior is not overtly evident. The nonlinear behavior is shown clearly, however, in a plot of the stress or strain as a function of load. The strain of the first constituent for each member, depicted as a function of load is given in Figure 7.


FIGURE 6. Stress at each element for each energy point displayed in Figure 4. Note that the specified energy values are separated by a factor of 2

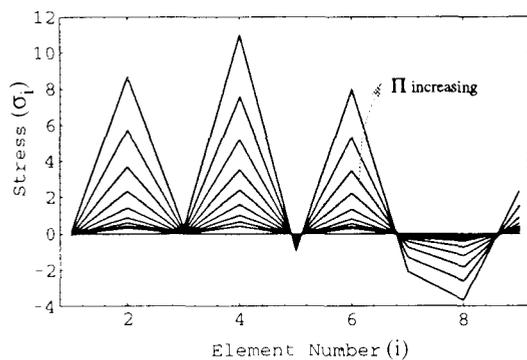

At sufficiently small energies (and loads) the system behaves linearly. However, as soon as one of the constituents 'locks', nonlinear behavior ensues. The evolution of the first hardening constituent, ϵ_i^1 , is representative of the behavior of all the constituents for the remaining elements (i.e. σ_i , and ϵ_i^2), except note that the linear constituent, σ_i , is not limited. This type of nonlinear behavior is excep-

tional in the sense that the usual ingrained notions of proportional loading are not followed.

FIGURE 7. Strain of the first constituent, for each of the nine elements, as a function of load.

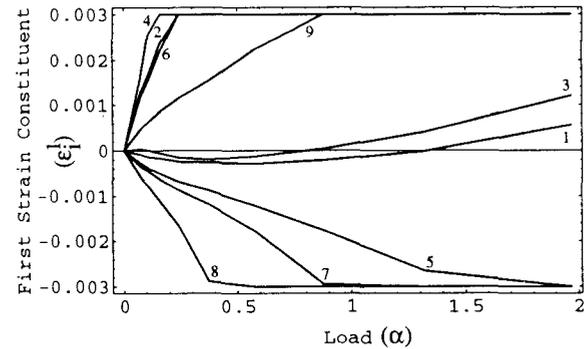

2.2.2 Pyramidal Truss

The preceding example demonstrates that this technique can be employed to analyze a typical truss geometry with an atypical nonlinear hardening constitutive law. However in many respects the example is cumbersome in that the evolution of behavior in the constituents is not immediately obvious. Part of this stems from a geometry with elements that are intertwined at disparate angles. Interpreting these results requires a ponderous process of piecing together aspects of several of the figures. To simplify matters, especially for the subsequent example design problem, a simpler geometry was explored.

The second example problem demonstrates the application of this method of analysis to a simpler truss geometry, one for which the nonlinear evolution is easier to follow. This geometry consists of twelve nodes and eleven bar elements as shown in Figure 8. The truss is loaded at node number 1 by a horizontal load α . All nodes except the first are constrained not to move, i.e. representing a fixed support. Paralleling the previous example, each element has the same unbounded linear constituent modulus, the same cross sectional area, and is composed of two symmetrically stiffening constituents. That is, $\bar{E}_i = 64$, $\bar{\epsilon}_i^1 = \epsilon_i^1 = 0.008$, $\bar{\epsilon}_i^2 = \epsilon_i^2 = 0.016$, and $A_i = 0.1$ for $\{i \in 1, 2, \dots, 11\}$. However, here the moduli for the hardening constituents vary over the truss. This distribution is shown in Figure 9. The moduli have been chosen such that $E_i^1 + E_i^2 = 160$, so that for small energies where the system is linear, the geometry, material properties and loading are all symmetric. However, here the locking of a constituent, will not only cause the system to become nonlinear but to lose symmetry as well.

FIGURE 8. Pyramidal truss geometry and symmetric loading.

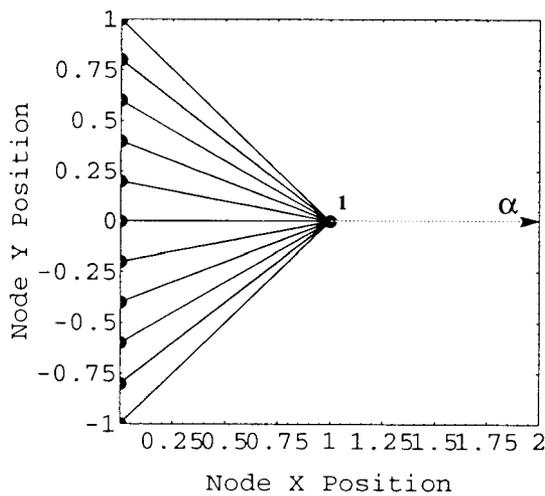


FIGURE 9. Moduli of the 'locking' constituents as a function of member support position at $x=0$.


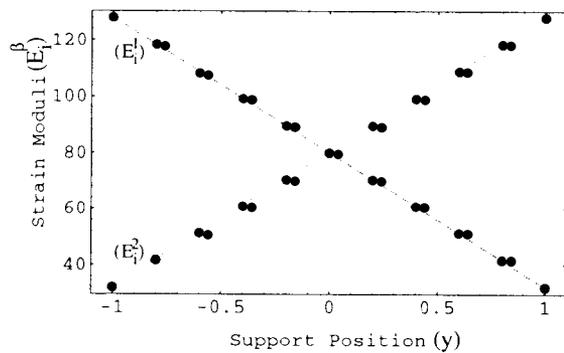



FIGURE 10. Load vs. displacement of the free node.

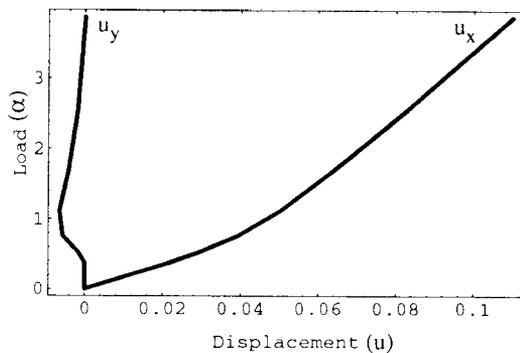

Thus, as shown in Figure 10, the deformation of the vertex of the truss in the y -direction (u_y) is initially zero, owing to the symmetry of the problem. As the material evolves, the symmetry is lost and there is a non zero (u_y) deformation. At higher energies and loads, all the constituents lock, and the material response again becomes symmetric and the deformation in the y -direction approaches zero.

The evolution of the linear constituents (σ_i) is shown in Figure 11. Evolutions of the two locking constituents (ϵ_i^1 and ϵ_i^2) are shown in Figures 12 and 13, respectively.

FIGURE 11. Stress of the enduring constituents as a function of support position with increasing energy as a parameter.

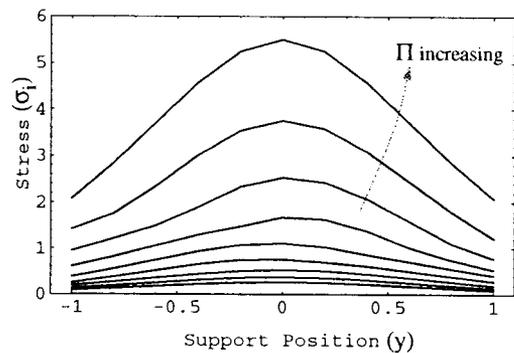

These figures reinforce the statements concerning the load-displacement behavior of the system. At small energies and loads, the system remains linearly elastic. At higher energies, the locking constituents reach their constraints. This causes the nonlinearity in the load-displacement behavior. This is evident in the enduring constituent (σ_i) as a slight asymmetry in the stress distribution. At higher energies, when almost all of the members have 'locked', the stress distribution has nearly recovered its symmetry.

FIGURE 12. Strain in the first locking constituent as a function of support position with increasing energy as a parameter.


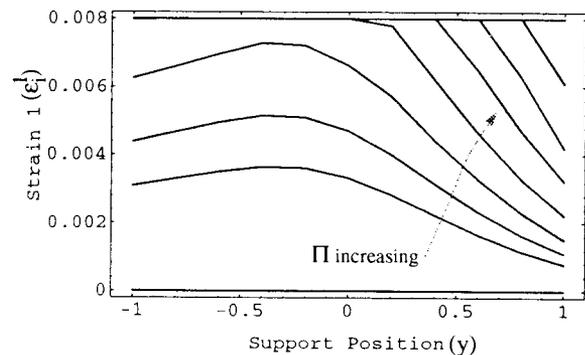


FIGURE 13. Strain in the second locking constituent as a function of support position with increasing energy as a parameter.

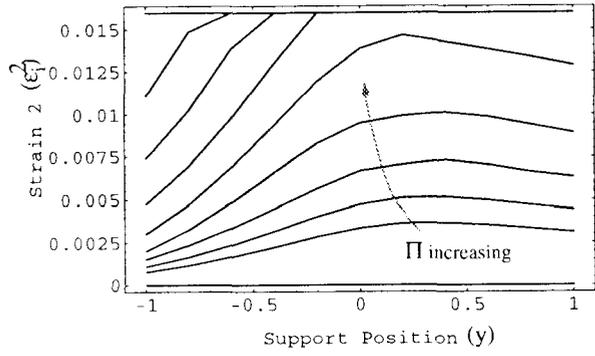

3.0 Design of Material Properties for The Optimum Truss

A formulation is presented in this section that relates to the prediction of optimal material properties in the context of a global structural design problem. Specifically, the purpose is to determine the distribution of *adjustments* to the material properties identified with *locking limits*, for all or a part of the set of constituents, so that a lower bound on the overall structural ‘energy’ is maximized. This is equivalent to minimizing an equilibrium state for which the total energy is no less than a specified value. (The two formulations are alternate statements of equivalent, isoperimetric problems.) Stated differently, the optimal adjustments are those for which stiffening of the structure is deferred as much as possible. The optimal design problem presented here is a convex problem stated in isoperimetric form. An interpretation is given for the ‘necessary conditions’ of this problem, and the optimal quality of the solution to the system is verified.

3.1 Design Problem Formulation

Modifications to the locking limits are symbolized by vectors ϕ_i^β and ψ_i^β , which represent respectively the changes in value of the upper and lower bounds on constituent strains. Components of these vectors are restricted to be nonnegative, and the overall modification to structural material is limited by the isoperimetric constraint:

$$\sum_{\beta} \sum_i A_i l_i (\phi_i^\beta + \psi_i^\beta) - R \leq 0 \quad \text{(EQ 16)}$$

Bound R appearing in this constraint is a measure of total resource for material modification and is a new element of data. The design problem is described formally relative to the analysis problem [P], in terms of an outer ‘min’ with

respect to the design parameters ϕ_i^β and ψ_i^β . In other words, the sets of design parameter are to be determined according to:

$$\begin{aligned}
 & \phi, \psi \quad \alpha, \sigma, \epsilon, u \\
 & \min [\min \alpha] \\
 & \text{subject to:} \\
 & \frac{1}{2} \left\{ \sum_{i=1}^M A_i l_i \left[\frac{\sigma_i^2}{E_i} + \sum_{\beta=1}^{N_i} E_i^\beta (\epsilon_i^\beta)^2 \right] \right\} - \\
 & \quad \alpha \sum_{\gamma=1}^N p_\gamma u_\gamma + \Pi \leq 0 \quad \text{(C1)} \\
 & A_i l_i [\epsilon_i^\beta - (\bar{\epsilon}_i^\beta + \phi_i^\beta)] \leq 0 \quad \text{(C2.1)} \\
 & A_i l_i [-\epsilon_i^\beta - (\epsilon_i^\beta + \psi_i^\beta)] \leq 0 \quad \text{(C2.2)} \\
 & A_i \left\{ \sum_{\gamma=1}^N D_{i\gamma} u_\gamma - \left(\frac{\sigma_i}{E_i} + \sum_{\beta=1}^{N_i} \epsilon_i^\beta \right) l_i \right\} = 0 \quad \text{(C3)} \\
 & \quad -\phi_i^\beta A_i l_i \leq 0 \quad \text{(C4.1)} \\
 & \quad -\psi_i^\beta A_i l_i \leq 0 \quad \text{(C4.2)} \\
 & \sum_{i=1}^{N_i} \sum_{\beta=1}^M A_i l_i (\phi_i^\beta + \psi_i^\beta) - R \leq 0 \quad \text{(C5)}
 \end{aligned}$$

The order of the ‘min’s is interchangeable (see e.g. Jog, Haber & Bendsøe¹⁴ or Bendsøe et. al.¹⁵ for a justification), and so it is justifiable to consider separately the necessary conditions associated with the design part of the problem [M]. With the introduction of η_i^β , ζ_i^β , and Γ as multipliers associated with the last three amongst the constraints listed, i.e., the constraints associated with design variables ϕ_i^β and ψ_i^β , these conditions are:

$$-\mu_i^\beta - \eta_i^\beta + \Gamma = 0 \quad \text{(EQ 17)}$$

$$-\nu_i^\beta - \zeta_i^\beta + \Gamma = 0 \quad \text{(EQ 18)}$$

It may be verified that so long as $R > 0$ in problem [M], the multiplier Γ satisfies $\Gamma > 0$. An immediate consequence of (17) is that in order for a modification of the locking limit to occur, it is necessary that the respective strain constituent should have become locked in the original, i.e. unmodified system. This result may be verified via the following argument. Suppose that constraint (C 2.1) of problem [M] is met by inequality; then the associated multiplier μ_i^β has value zero, and so from (17):

$$\eta_i^\beta = \Gamma \quad \text{(EQ 19)}$$

Thus in view of the (Kurash-Kuhn-Tucker) requirement $\eta_i^\beta \phi_i^\beta = 0 \forall i; \beta$, it follows that, for components governed by (19), satisfaction of constraint (C2.1) by inequality implies $\phi_i^\beta = 0$, i.e., the associated locking constraint bound value is not modified. Similar argument leads to the counterpart of this result for the constraint bounding strain on the negative side, and completes the proof.

To continue the interpretation, note that for $\mu_i^\beta > 0$, from constraint (C2.1) of problem [M], $\epsilon_i^\beta - (\bar{\epsilon}_i^\beta + \phi_i^\beta) = 0$. It follows from (C2.2) that in this case $v_i^\beta = 0$. Given the similar argument as it applies in reverse, i.e., $v_i^\beta > 0$ implies $\mu_i^\beta = 0$, we have that the multipliers μ_i^β and v_i^β are orthogonal; $\mu_i^\beta v_i^\beta = 0$ for all i and β . The alternative possible consequences of the necessary conditions (17, 18) are considered next. As noted from (C2.1) in the case $\mu_i^\beta > 0$ {or from (C2.2) for $v_i^\beta > 0$ } that:

$$\epsilon_i^\beta - (\bar{\epsilon}_i^\beta + \phi_i^\beta) = 0 \quad (\text{EQ 20})$$

$$\{ \text{or } -\epsilon_i^\beta - (\bar{\epsilon}_i^\beta + \psi_i^\beta) = 0 \} \quad (\text{EQ 21})$$

If also $\eta_i^\beta > 0$ or $\{ \text{or } \zeta_i^\beta > 0 \}$, then there is no modification to the strain bound i.e., $\phi_i^\beta = 0$ {or $\psi_i^\beta = 0$ }, and so the value of the associated strain constituent is just equal to the original locking strain bound, $\epsilon_i^\beta = \bar{\epsilon}_i^\beta$ {or $-\epsilon_i^\beta = \bar{\epsilon}_i^\beta$ }. More generally one expects to find $\phi_i^\beta > 0$ in conjunction with $\mu_i^\beta > 0$ {or $\psi_i^\beta > 0$ with $v_i^\beta > 0$ }, and then the associated (optimal) modifications are evaluated directly from (20) and (21). Referring to expressions for stress/strain relations obtained in section (2), and with the substitution of $\mu_i^\beta = \Gamma$ or $v_i^\beta = \Gamma$ from the results above, the stresses evaluated according to the solution for the optimally modified locking constraint values are given by:

$$\begin{aligned} \sigma_i - E_i^\beta (\bar{\epsilon}_i^\beta + \phi_i^\beta) &= \Gamma / \Lambda & \text{where } \mu_i^\beta > 0 \\ -\sigma_i - E_i^\beta (\bar{\epsilon}_i^\beta + \psi_i^\beta) &= \Gamma / \Lambda & \text{where } v_i^\beta > 0 \end{aligned}$$


According to these results the difference between total stress σ_i and the values of stress at with locking occurs ('locking stress') has constant value. This remarkable result holds for all constituent strains ϵ_i^β (over the structural system) which have become locked at the respective loads. Also, as a sidelight, it may be observed from this property of the results that the solution for design problem [M] *minimizes the maximum measure* of the cited difference in stress values (again, over the entire structure).

3.2 Computational Examples

The above design problem was applied to the same pyramidal truss that was treated in Section 2.2.2 as the second example of analysis. As noted in the problem description given above, the evolution of local stiffening in a structure

made of stiffening material may be determined from the results of a set of solutions to the original analysis problem. The end result of a series of such solutions is summarized in Figure 14 with the details of one of the locking constituents shown in Figure 15. The overall effect of the design is, as expected, to minimize the structural stiffness of the truss. Here this minimization predicts a modification of stiffening limits that has structural response tend toward that of the linear structure.

FIGURE 14. Load versus displacement for increasing values of resource of the locking constraint.

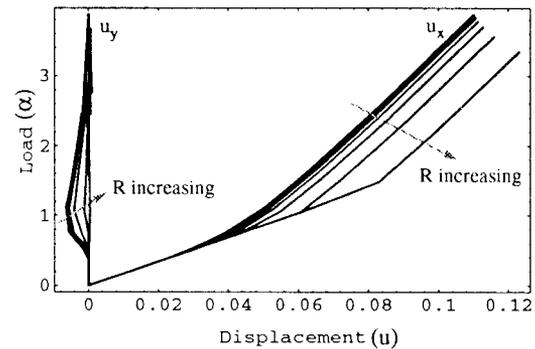

At small energies, there is no modification to the load distribution in the problem. As the specified energy is increased, the locking constraints are modified to allow the system to remain linear elastic (i.e. not locked). The distribution of the locking parameter varies as a function of energy. Considering that the extension of the modelling for this problem to accommodate the present purpose, i.e. the prediction of optimal relaxation of the locking bounds, it is understandable that the solution to the design problem varies with load (or energy) level. This is characteristic of problems in optimal design in the presence of a constitutive nonlinearity.

It may be established as well from the results for the design problem described in this section, that there exists an upper limit say \bar{R} , such that the problem admits sensible interpretation for values of modification resource R lying within the range $0 < R < \bar{R}$. The upper bound value, which varies with overall load on the structure, is the value such that in the structure with optimally modified material, all constituent strains ϵ_i^β will at most have just reached their respective locking limits in the fully loaded system. In otherwords, the solution associated with $R = \bar{R}$ provides that no locking occurs as the loads are applied. As a consequence, the structural response is simply linear. Note that in this case the conventional measure of compliance is minimized for the optimal structure. This behavior can be seen for the present example in Figure 16.

FIGURE 15. Effect of available resource on the strain distribution, and limits for the first strain constituent. The grey lines indicate the improved design, the black lines indicate the original design (i.e. Figure 12).


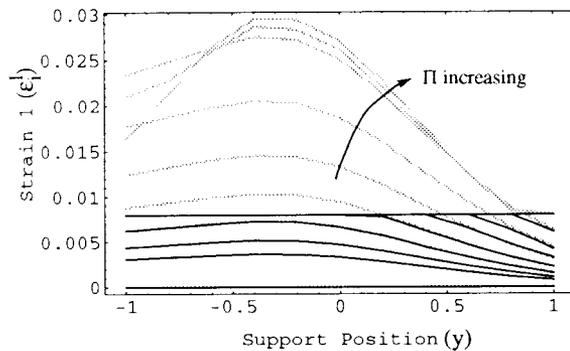


FIGURE 16. Overall stiffness of the structure for increasing values of allowable resource and increasing energy.

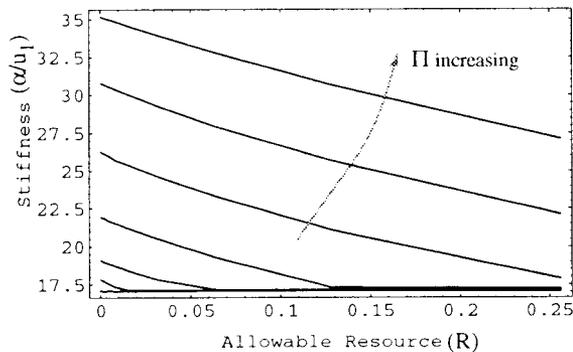

4.0 Concluding Remarks

The analysis of a truss system composed of a nonlinear material has been demonstrated using a mixed form equilibrium principle. This principle was extended to incorporate the design of parameters identified with the constituent locking limits of the stiffening material. Perhaps the most significant conceptual steps are in the formulation of the original principle described in the analysis problem [P]. Here a set of constituents are assembled to provide an overall nonlinear material response. This formulation leaves normal conservation statements (e.g. energy, compatibility, and constituent limits) in their simple form as constraints on the response of the system. For instance even though the overall response of the system is generally nonlinear, the mathematics is remarkably tidy. This form of the analysis problem allows the straightforward insertion of the parameters, and simplifies extension of the extremum problem statement to cover the design of the material properties.

One can speculate that other aspects of [P] (e.g. the infinitesimal of the strain-displacement equations) might also be directly extended (e.g. finite strain-displacement equations).

5.0 References

1. Taylor, J.E., "A Global Extremum Principle in Mixed Form for Equilibrium Analysis with Elastic/Hardening Materials (A Generalized Minimum Potential Energy Principle)", 1992 - to appear, *J. Appl. Mech.*
2. Hlavacek, I., Rosenberg, J., Beagles, A.E., and Whiteman, J.R., "Variational Inequality Formulation in Strain Space and Finite Element Solution of an Elasto-Plastic Problem with Hardening", *Comput. Methods Appl. Mech. Engrg.* **94**, (1992), pp 93-112
3. Simo, J.C. Kennedy, J.G., and Taylor, R.L., "Complementary Mixed Finite Element Formulations for Elastoplasticity", *Comput. Methods Appl. Mech. Engrg.* **74**, (1989), pp 177-206.
4. Comi, C., Corigliano, A., and Maier, G., "Extremum Properties of Finite Step Solutions in Elastoplasticity with Nonlinear Mixed Hardening", *International Journal of Solids and Structures*, **27**, (1991), pp 965-981.
5. Prager, William, "On Ideal Locking Materials", *Trans. Soc. Rheology*, **1**, (1957), pp 169-175
6. Washizu, Kyuichiro, Variational Methods in Elasticity And Plasticity, Pergamon Press, New York, 3rd ed. (1982)
7. Oden, J.T., and Reddy, J.N., Variational Methods in Theoretical Mechanics, Springer -Verlag, Heidelberg, (1976)
8. Arthurs, A.M., Complementary Variational Principles, 2nds. Ed., Clarendon Press, Oxford. (1980)
9. Sewell, M.J., Maximum and Minimum Principles, Cambridge University Press, Cambridge, England, (1987)
10. Taylor, J.E., "A Global Extremum Principle for the Analysis of the Solid Composed of Softening Material", *Int. J. Solids and Structures*, Vol. **30**, No. 15, pp 2057-2069, (1993)
11. MATLAB, by The MathWorks, Inc. Natick, MA. Version 4.0a, December 11, 1992.
12. Hewlett-Packard Computer Model 9000/715
13. Schittowski, K., "NLQPL: A FORTRAN Subroutine Solving Constrained Nonlinear programming Problems," *Operations Research*, **5**, (1985), 485-500

14. Jog, C., Haber, R.B., and Bendsøe, M.P., "Topology Design with Optimized, Self Adaptive Materials", DCAMM Report No. 457, The Danish Center for Applied Mathematics and Mechanics, The Technical University of Denmark, Lyngby, Denmark (1993)
15. Bendsøe, M.P., Guedes, J.M., Haber, R.B., Pederson, P, Taylor, J.E., "An analytical Model to Predict Optimal Material Properties in the Context of Optimal Structural Design", 1992 - to appear, *J. Appl. Mech.*